

# LAZER ZX6.6 SET UP SHEET



Name \_\_\_\_\_ Date \_\_\_\_\_ Truck / City \_\_\_\_\_ Event \_\_\_\_\_

### Front Suspension:

#### Shock Position:



#### Shock Stay:

- Std.
- Carbon (LAW58)
- Other \_\_\_\_\_

#### Lower Sus Holder Block:



Front \_\_\_\_\_ Rear \_\_\_\_\_

#### Lower Sus Holder Spacer:

Front \_\_\_\_\_ mm Rear \_\_\_\_\_ mm

#### Comments:

#### Upper Arm Position:




#### 4.8mm Ball Stud:

- 97050M(Std)
- UM129

#### Upper Spacer: \_\_\_\_\_ mm

#### Camber \_\_\_\_\_ °

#### Spacer: \_\_\_\_\_ mm

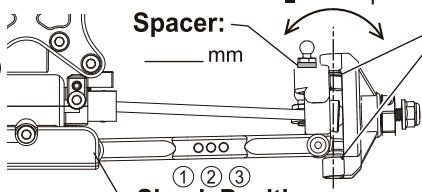


#### Shock Position:

#### Wheelbase: Front \_\_\_\_\_ mm

Rear \_\_\_\_\_ mm

#### Bump Steer Spacer: \_\_\_\_\_ mm




#### Toe:

- In \_\_\_\_\_ °
- Out \_\_\_\_\_ °

#### Sway Bar:

- None
- \_\_\_\_\_ mm

#### Ackerman Spacer: \_\_\_\_\_ mm



#### Axle-Height Spacer:

- Up
- Down

#### Caster Block:

- 7°
- 10°

#### Stiffener:

- Std.
- Carbon Comp. (LAW52)

#### Front Diff:

- Gear Diff. # \_\_\_\_\_
- Ball Diff. \_\_\_\_\_

### Rear Suspension:

#### Shock Position:



#### Shock Stay:

- Std.
- Carbon (LAW59)
- Other \_\_\_\_\_

#### Wing Stay Position:

#### Lower Sus Holder Block:



Front \_\_\_\_\_ Rear \_\_\_\_\_

#### Lower Sus Holder Spacer:

Front \_\_\_\_\_ mm Rear \_\_\_\_\_ mm

#### Comments:

#### Upper Arm Position:



#### 4.8mm Ball Stud:

- 97050M(Std)
- UM129


#### Upper Spacer: \_\_\_\_\_ mm

#### Toe In: \_\_\_\_\_ °

#### Sus. Arm:

- LA272(Std)
- UM713B

#### Camber \_\_\_\_\_ °

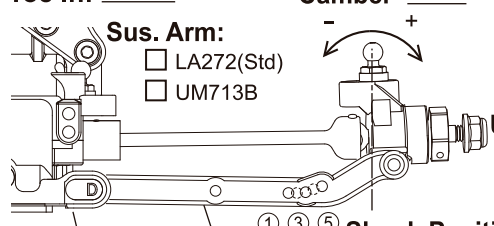


#### Shock Position:

#### Wheelbase:

Front \_\_\_\_\_ mm

Rear \_\_\_\_\_ mm


#### Hub Carrier:



Type-B (UM519)

Type-B2 (UM519-2)

#### Upper Spacer: \_\_\_\_\_ mm



#### Wheelbase:

Front: \_\_\_\_\_ mm

Rear: \_\_\_\_\_ mm

#### Stiffener:

- Std.
- Carbon Comp. (LAW53)

#### Center Drive :

- Diff. Gear # \_\_\_\_\_
- Slipper Clutch
- Separates
- Direct

- 0°Type-B(UM519)
- 0°Type-B2(UM519-2)
- 0°Alu(UMW704-0)
- 0.5°Alu(UMW704-05)
- 1°Alu(UMW704-1)

#### Sway Bar:

- None
- \_\_\_\_\_ mm

#### Center Plate:

- Std.
- Aluminum (LAW55)

#### Rear Diff:

- Gear Diff. # \_\_\_\_\_
- Ball Diff. \_\_\_\_\_

### Shock:

#### Front

#### Rear

#### Shock Piston: \_\_\_\_\_

#### Shock Oil: # \_\_\_\_\_ # \_\_\_\_\_

#### Shock Spring: \_\_\_\_\_



#### Limiters:

| in    |       | mm    |       | in    |       | mm    |       |
|-------|-------|-------|-------|-------|-------|-------|-------|
| out   | mm    | out   | mm    | out   | mm    | out   | mm    |
| _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |

#### Shock Length (A): \_\_\_\_\_ mm \_\_\_\_\_ mm


#### Shock Top Type: Alu. (UM719/Std) UM753-1

#### 5.8mm Ball End:



### Chassis:

#### Ride Height:

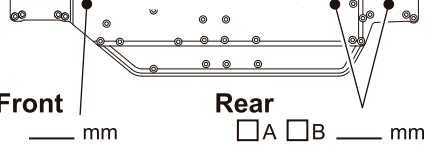

Front \_\_\_\_\_ mm

Rear \_\_\_\_\_ mm

A  B \_\_\_\_\_ mm

#### Tire:

#### Front

#### Rear

Tire: \_\_\_\_\_  
 Compound: \_\_\_\_\_  
 Inserts: \_\_\_\_\_  
 Wheel: \_\_\_\_\_  
 Note: \_\_\_\_\_

### Electronics:

#### Battery:

- Saddle Pack
- Short

#### Motor Position:

- Front
- Rear

#### Servo Mounting:

- Straight
- Sideways
- Aluminum (LAW56)

#### Motor: \_\_\_\_\_

#### Pinion / Spur: \_\_\_\_\_

#### ESC: \_\_\_\_\_

#### Radio: \_\_\_\_\_

#### Servo: \_\_\_\_\_

### Body / Wing:

#### Body:

#### Wing Mount:

#### Wing Dum Height: \_\_\_\_\_ mm

- Narrow  Wide

#### Wing:

#### Wing Angle:

#### Lip Height: \_\_\_\_\_ mm

- 4°  7°  10°

### Material:

- Screw:  Steel  Titanium

#### Pinion Gear:

- Steel  Aluminum

#### Shock O-Ring:

- O-ring  X-ring  Red  Clear

#### Comment :

### Truck Condition

- Smooth  Sandy
- Bumpy  Soft Dirt
- Low Truction  Grass
- Med. Truction  Blue Groore
- Higt Truction  Clay
- Wet  Dusty
- Dry  \_\_\_\_\_