
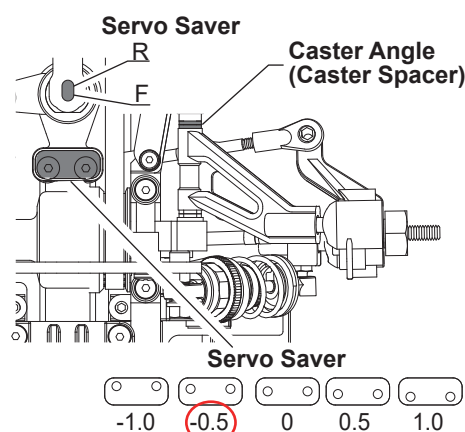



V-ONE R4evo.3




SET UP SHEET Ver 1.00

Name		Temp	°C	Engine	12TG.ver5	Muffler	
Date		Humidity	%	Head Clearance	0.2 mm	Fuel Type	OS OFF ROAD 25 Evo
Track	SRT	Traction	%	Plug No.		Radio	SANWA M17

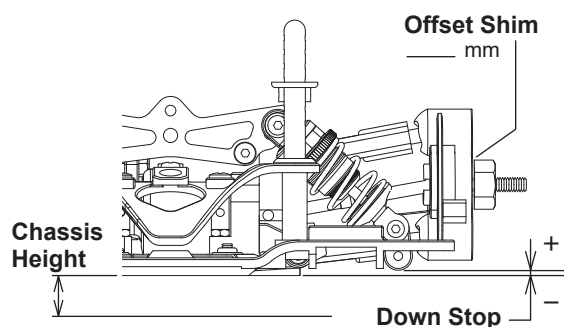

Servo Saver	0 +2 F R	-1.0 -0.5 0 0.5 1.0
Wheel Base	N	1mm Short
Upper Arm Front	0 0 0 0 0	
Upper Arm Rear	0 0 0 0 0	
Bump Steering	N	1.0mm
Knuckle Type	0 deg	1 deg 2 deg

Shock Type	Normal(W5308GM)	
Shock Oil	600	
Shock Piston	3-1.1(W5307-09)	
Shock Top / Pressure Form	W5307-06	
Spring / Spring Sheet	W5308-15325	
Ball End Type	S	
Shock Position	A B C D E	
Caster Angle(Spacer)	1 mm	
Camber Angle 0G/1G	L 0 0.5 1 1.5 2 R 0 0.5 1 1.5 2	
Toe Angle	-1 deg	
Front Width	197 mm	
Down Stop	-1.5 mm	
Wheel Spacer	0.5 mm	
Sway Bar	VZ084 2.2 mm	
Tire / Insert		
Chassis Height	6mm/60 mm	
Weight Position	mm	
Front Diff. Oil	VZW447(FTT)+150000	

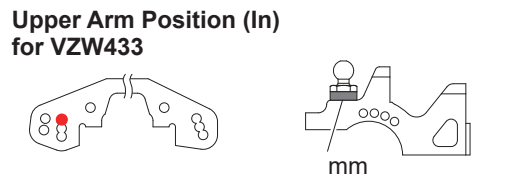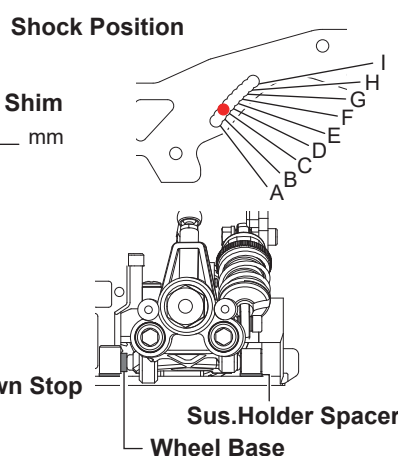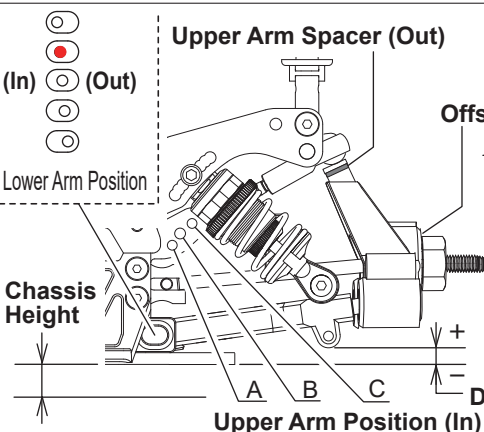

Shock Type	Normal(W5308GM)	
Shock Oil	650	
Shock Piston	3-1.1(W5307-09)	
Shock Top / Pressure Form	W5307-06 x2	
Spring / Spring Sheet	W5308-164	
Ball End Type	S	
Shock Position	A B C D E F G H I	
Wheel Spacer		
Upper Arm Position (In)		
Upper Arm Spacer (Out)	1.5mm	
Camber Angle 0G/1G	L 0 0.5 1 1.5 2 3 R 0 0.5 1 1.5 2 3	
Toe Angle	3.0 deg	
Rear Width	198 mm	
Down Stop	+1 mm	
Sway Bar	2.0 mm	
Sway Bar Link Rod	43 mm	

Clutch Type	Swing Push	Pinion Gear	AL STEEL 15 16 17 20 21 22 23	Shock Type	Normal(W5308GM)	
Clutch Shoe	VZW442-04TG	Spur Gear	59 60 61 54 55 56	Shock Oil	650	
Clutch Weight	VZW442-03	Drive Ratio	23T Pully 384Belt	Shock Piston	3-1.1(W5307-09)	
Clutch Spring	VZW442-08(1.8)mm		24T Pully 387Belt	Shock Top / Pressure Form	W5307-06 x2	
Clearance	0.5~0.6mm	Rear Diff. Oil	40000	Spring / Spring Sheet	W5308-164	
Adjust Nut	1.3 mm	Sus. Holder Spacer	0 mm	Ball End Type	S	
				Shock Position	A B C D E F G H I	
				Wheel Spacer		
				Upper Arm Position (In)		
				Upper Arm Spacer (Out)	1.5mm	
				Camber Angle 0G/1G	L 0 0.5 1 1.5 2 3 R 0 0.5 1 1.5 2 3	
				Toe Angle	3.0 deg	
				Rear Width	198 mm	
				Down Stop	+1 mm	
				Sway Bar	2.0 mm	
				Sway Bar Link Rod	43 mm	
				Tire / Insert		
				Chassis Height	7.5mm/61 mm	
				Weight	1650	
				Wheel Base	N 1.0mm Short	
				Body	GORO UL 3mm forward	

memo : ホイールベースはフロント, リアを1mm短くする。オプション (優先順位順) VZW443B / VZW433

VZW437-2 / VZW446 / VZW457 / VZW458 / VZW445 / VZW428 / VZW459 / VZW431

フロントにW5308-01B LDスプリングシートを使用。車高はアジャスター隙間でF 3.6mm, R 4.0mm

クラッチは振り子、クラッチシューは3.6mmに薄くする。ガルシューはウエイトとしてM4x4イモネジを追加する (下穴は3.8)