


Name _____ Date _____ Truck / City _____ Event _____

Front Suspension



Upper Spacer: _____ mm




4.8mm Ball Stud: Camber: _____ °
 UM128(Std.)
 UMW508 (+2mm High Mount)

4.8mm Ball Stud Spacer: _____ mm

AL. Steering Support:

None
 UMW724



4.8mm Ball Stud:

LA246 (-1mm Low Mount)
 97050M (Std)

Ackerman Steer Spacer:

_____ mm
 UMW701 Aluminum ST Plate
 UMW702 Aluminum Clank Arm

Axle Spacer:

Out _____ mm
 In _____ mm

Wheel Hub:


UM569 / Std
 UM506

Axle Height Spacer:

_____ mm
 _____ mm

Bump Steer Spacer:

_____ mm




Toe: In Out _____ °

Tie Rod: _____

Front Bulkhead Weight Placement:

None
 Bulkhead Inside _____ oz _____ g
 On the skid plate _____ oz _____ g * 1oz=28g



Caster:

25°
 30°

Caster Block: 0.5 0°
 1.0 2°
 None 4°


Caster Block Position:

IN (wide/Std)
 OUT (Narrow)

Comments: _____

Wheelbase: F: _____ mm R: _____ mm

Rear Suspension




4.8mm Ball Stud:
 UM129
 UMW508 (+2mm High Mount)
 97050M
 UM128(Std.)

Upper Spacer: _____ mm

Sus Holder Spacer:


F 0.5 1.0 None
 R 0.5 1.0 None



Anti-Squat: _____ °

Camber: _____ °

Universal Swing Shaft:

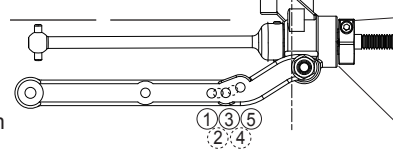

Upper Spacer:

_____ mm

Wheelbase:

F: _____ mm
 R: _____ mm

Wheelbase:

F: _____ mm
 R: _____ mm

Sway Bar: None
 _____ mm

Drive Hub :

4mm (TFW113)
 4.5mm (LAW30GM/Std.)
 5.2mm (UMW523)


Axle Spacer:

Out _____ mm
 In _____ mm


Rear Hub Carrier :

0° Type-B (UM519)
 0° Type-B2 (UM519-2)
 0° Alu (UMW704-0)
 0.5° Alu (UMW704-05)
 1° Alu (UMW704-1)

RR:



Mid:



Lower Sus. Holder:

Normal
 Narrow RF Wide RF2
 Option
 UMW511GM (RF/Alu)

(Opt/Adjustable)
 UMW705(RF/Alu) _____ Block
 UMW725(RF-MID/Bra) _____ Block
 (Opt/Adjustable)
 UMW706(RR-RWD) _____ Block
 UMW707(RR-MID) _____ Block

Motor Position

Rear Motor
 Midship Motor


Diff.

Gear Diff. # _____
 Ball Diff.

Shock


Front Rear

Shock Piston: _____
 Shock Oil: # _____ # _____
 Shock Spring: _____
 Limiters: in out mm mm in out mm mm
 Shock Length(A): _____ mm _____ mm
 O-ring: _____
 Shock Top type: Alu(UM719/Std) UM753-1
 Ball End type: Front: S M L
 Rear: S M L



Battery Placement:

None
 Screw



Foam:

Front
 Rear
 None

Battery Type


Straight
 Separate
 Short

Type: _____

Other

Motor: _____
 ESC: _____
 Pinion/Spur: _____

Chassis

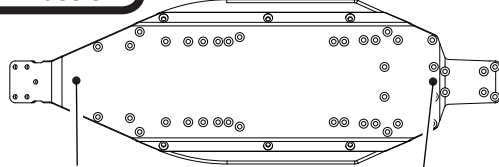

F _____ mm Ride Height: R _____ mm

Truck Condition

Smooth Sandy
 Bumpy Soft Dirt
 Low Truction Grass
 Med. Truction Blue Groove
 Higt Truction Clay
 Wet Dusty
 Dry Other

Wing

Wing Mount : Narrow Wide
 Wing Angle : 4° 7° 10°
 Blast-S
 Blast-L
 Step-S
 Step-M
 Step-L
 Step 2.0
 Step 3.0
 Straight Lip :
 Round

Tire

Front Rear Traction Compound or comment:

Tire: _____
 Inserts: _____
 Wheel: _____

Comment

