

FAZER Rally SET UP SHEET



Name _____


Date _____ / _____ / _____

Truck/City _____

Event _____

Front

Shock Position :

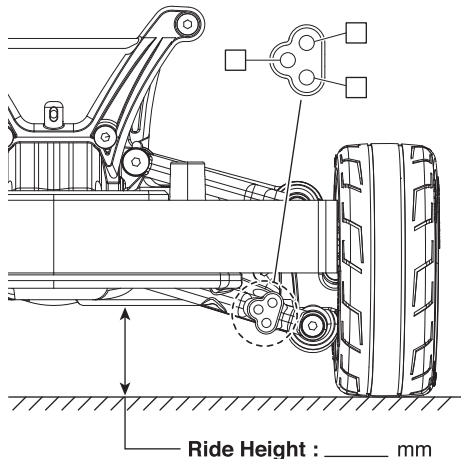

Ride Height : _____ mm

Camber :


☐ Std.

☐ FAW205


☐ Type 1

☐ Type 2

☐ Type 3




Caster Spacer :



Tie Rod :

☐ Std.

☐ Adjustable




Sway Bar :

☐ NONE

☐ FAW208

☐ S ☐ M ☐ H



Front Diff. :

☐ Gear Diff.

☐ 2 Bevel


☐ 4 Bevel

Diff. Oil

☐ Ball Diff.

☐ Spool

Rear

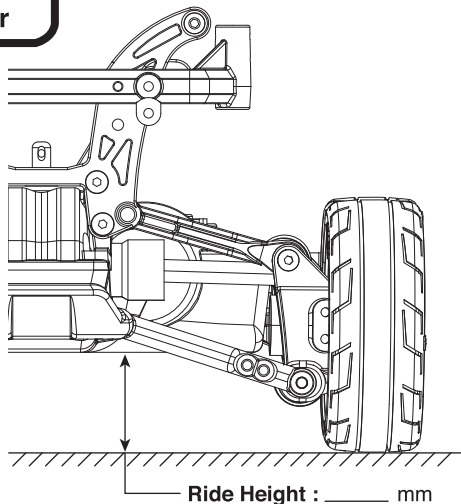


Ride Height : _____ mm

Upper Arm Position :

☐ Std.

☐ FAW206



Sway Bar :

☐ NONE

☐ FAW208

☐ S ☐ M ☐ H



Rear Diff. :

☐ Gear Diff.

☐ 2 Bevel

☐ 4 Bevel

Diff. Oil

☐ Ball Diff.

Shock

Front

Rear

Shock Piston: _____

Shock Oil: # _____

Shock Spring: _____

Limiters:

in

out

mm

mm

in

out

mm

mm


Shock Length(A): _____ mm

_____ mm

O-ring: _____

Ball End type: Front : ☐ S ☐ M ☐ L


Rear : ☐ S ☐ M ☐ L





Chassis

Front

☐ 190mm




☐ 200mm

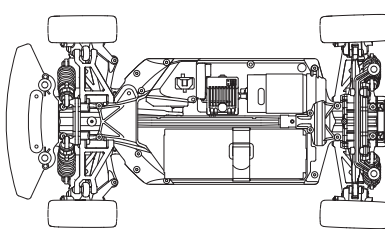


Rear

☐ 190mm



☐ 200mm



Battery : _____

Tire

Tire _____

Tire Insert _____

Wheel _____

Body

Body _____

Others

Motor _____

Pinion/Spur _____

ESC _____

Truck Condition

☐ Smooth

☐ Bumpy

☐ Low Truaction

☐ Med. Truaction

☐ Higt Truaction

☐ Wet

☐ Dry

☐ Sandy

☐ Soft Dirt

☐ Grass

☐ Blue Groore

☐ Clay

☐ Dusty

☐ Other

Comments : _____
