

FAZER Rally SET UP SHEET

KYOSHO
THE FINEST RADIO CONTROL MODELS

Name _____


Date _____ / _____ / _____

Truck/City _____

Event _____

Front

Shock Position :

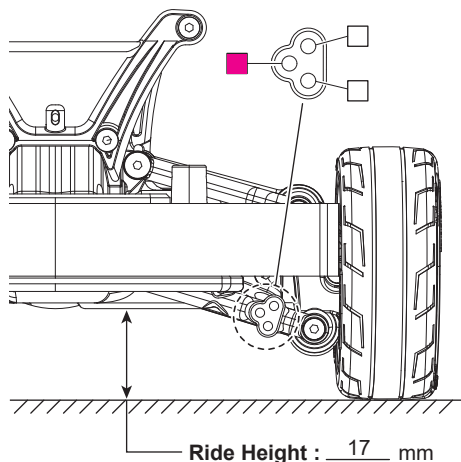

Camber :


☒ Std.

☐ FAW205

☐ Type 1

☐ Type 2


☐ Type 3




Tie Rod :

☒ Std.

☐ Adjustable



Caster Spacer :



Sway Bar :

☒ NONE

☐ FAW208

☐ S ☐ M ☐ H



Front Diff. :

☒ Gear Diff.

☐ 2 Bevel

☒ 4 Bevel


Diff. Oil

2000

☐ Ball Diff.

☐ Spool


Rear

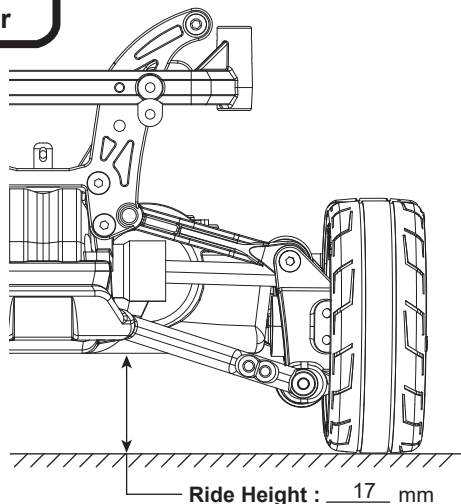

Upper Arm Position :

☒ Std.

☐ FAW206



Sway Bar :

☒ NONE

☐ FAW208

☐ S ☐ M ☐ H



Rear Diff. :

☒ Gear Diff.

☐ 2 Bevel

☒ 4 Bevel

Diff. Oil

2000

☐ Ball Diff.

Shock

Front

Rear

Shock Piston: $\Phi 1.2 \times 5$ 穴 (Std.) $\Phi 1.2 \times 5$ 穴 (Std.)

Shock Oil: # 450 # 450

Shock Spring: 3.4 (Std.) 2.1 (Std.)

Limiters: in out mm in out mm


Shock Length(A): 18 mm 29.5 mm

O-ring: オレンジ (Std.) オレンジ (Std.)

Ball End type: Front : ☐ S ☐ M ☒ L

Rear : ☐ S ☒ M ☐ L


UM589 ブラダンパー使用




Chassis

Front

☐ 190mm




☒ 200mm




Rear

☐ 190mm



☒ 200mm



Battery : _____

Tire

Tire Jetko JK3201SS

Tire Insert JK3201SS

Wheel VZH003BK

Body

Body IMPREZZA

Others

Motor G14L

Pinion/Spur 68T/32T

ESC Readysset付属

Truck Condition

☐ Smooth

☐ Bumpy

☐ Low Truction

☐ Med. Truction

☐ Higt Truction

☐ Wet

☐ Dry

☐ Sandy

☐ Soft Dirt

☐ Grass

☐ Blue Groore

☐ Clay

☐ Dusty

☐ Other

Comments : FAW230 ラリーコンバージョンセットを使用