

InfernoMP10 SET UP SHEET

ver.1.02



Name of Driver		Date		Track		Engine		Plug		Muffler	
KAZUYA TANAKA		2021/4/11		渋谷 (SBRT)		REDS		OS P4		REDS	
Condition:											
Spur Gear	Clutch Bell	Clutch Spring		Clutch Shoe		Tire		Tire Insert	Wheel	Body	Fuel
47 T	<input type="checkbox"/> Std. <input checked="" type="checkbox"/> LW 13 T	<input type="checkbox"/> 0.90 <input checked="" type="checkbox"/> 1.00 <input type="checkbox"/> 0.95 <input type="checkbox"/> 1.10		Carbon <input checked="" type="checkbox"/> x Aluminum <input checked="" type="checkbox"/> 3		Tire : <u>Blockade</u> Compounds: <u>M4</u>		PROLINE	IFH006W-H	TKI2	KLOZ

● Diff. Gear Set-Up

	Front	Center	Rear
Diff. Gear	<input checked="" type="checkbox"/> 10/20 <input type="checkbox"/> 12/18 <input type="checkbox"/> LSD	<input checked="" type="checkbox"/> 10/20 <input type="checkbox"/> 12/18 <input type="checkbox"/> LSD	<input checked="" type="checkbox"/> 10/20 <input type="checkbox"/> 12/18 <input type="checkbox"/> LSD
	Ring Gear <input checked="" type="checkbox"/> 43/13 <input type="checkbox"/> 42/12	# 10000	Ring Gear <input checked="" type="checkbox"/> 43/13 <input type="checkbox"/> 42/12
	# 10000	# 10000	# 5000

● Shock Set-Up


	Front	Rear
Shock Type	P : w/Diaphragm A : Aeration	
Shock Piston	B : Black W : White T : Taper	
Shock Oil	# 600	# 450
Shock Spring	レッド	レッド

● Ride Height

Front	Rear
26 mm	28 mm

● Rebound

Front	Rear
101 mm	117 mm

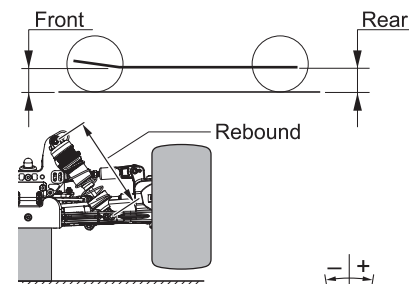


● Camber Angle

Front	Rear
\ominus 1°	\ominus 1°

+ Positive Camber
- Negative Camber

● Toe Angle


Front	Rear
\oplus 1°	<input checked="" type="checkbox"/> 2.5° <input type="checkbox"/> 3° <input type="checkbox"/> 3.5°



● Wheelbase

Collar of Rear Hub	Front Side 5 mm	Rear Side 0 mm
--------------------	-----------------	----------------

● Shock Mount Position



Shock Stay

Front	<input checked="" type="checkbox"/> Short <input type="checkbox"/> Long
Rear	<input checked="" type="checkbox"/> Short <input type="checkbox"/> Long


Rear Upper Shock Bush

<input type="checkbox"/> Std. <input checked="" type="checkbox"/> Long
--

Sus. Arm

Front	<input type="checkbox"/> In <input checked="" type="checkbox"/> Out
Rear	<input type="checkbox"/> In <input checked="" type="checkbox"/> Out

● Rear Upper Arm Position



<input checked="" type="checkbox"/> Plastic	<input type="checkbox"/> Aluminum
---	-----------------------------------

Hub Carrier Bush

<input type="checkbox"/> Plastic	<input checked="" type="checkbox"/> Brass
----------------------------------	---

● Rear Wheel Hub

<input type="checkbox"/> Narrow	<input checked="" type="checkbox"/> Std.	<input type="checkbox"/> Wide
---------------------------------	--	-------------------------------

● Front Sus. Arm

<input checked="" type="checkbox"/> Soft (Std.)	<input type="checkbox"/> Hard
---	-------------------------------



● Front Hub Carrier

<input type="checkbox"/> Plastic	<input checked="" type="checkbox"/> Aluminum
<input type="checkbox"/> 13°	<input type="checkbox"/> 16° <input checked="" type="checkbox"/> 17.5° <input type="checkbox"/> 19°

● Front Sus. Bush

Rear Side	<input type="checkbox"/> <input checked="" type="checkbox"/>
-----------	--

● Front Upper Arm Position



● Front Wheel Hub

<input type="checkbox"/> Narrow	<input type="checkbox"/> Std.	<input checked="" type="checkbox"/> Wide
---------------------------------	-------------------------------	--

Lower Bush

<input checked="" type="checkbox"/> Plastic	<input type="checkbox"/> Brass
<input type="checkbox"/> -1°	<input checked="" type="checkbox"/> 0° <input type="checkbox"/> +1°

● Rear Sus. Bush

Front Side	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
Rear Side	<input type="checkbox"/> (2.5) (2.5) <input type="checkbox"/> (3) (3) <input checked="" type="checkbox"/> (3.5) (3.5) <input type="checkbox"/> (4) (4) <input type="checkbox"/> (4) (4) <input type="checkbox"/> (5) (5)


● Rear Sus. Arm

<input checked="" type="checkbox"/> Soft (Std.)	<input type="checkbox"/> Hard
Rear Sus. Bush	
<input type="checkbox"/> Short	<input checked="" type="checkbox"/>
<input checked="" type="checkbox"/> Medium	<input type="checkbox"/>
<input type="checkbox"/> Long	<input type="checkbox"/>

● Servo Horn

Steering	Throttle
<input type="checkbox"/> Plastic	<input checked="" type="checkbox"/> Plastic
<input checked="" type="checkbox"/> AL. Long	<input type="checkbox"/> AL.
<input type="checkbox"/> AL. Short	

● Steering Plate



● Sway Bar

Front	Rear
ϕ 2.3	ϕ 2.5
0 mm	0 mm

● Weight

Front	Rear
<input checked="" type="checkbox"/> None	<input checked="" type="checkbox"/> None
<input type="checkbox"/> IFW604-10	<input type="checkbox"/> IFW605-10
<input type="checkbox"/> IFW604-20	<input type="checkbox"/> IFW605-20
<input type="checkbox"/> other	<input type="checkbox"/> other

● Wing

<input checked="" type="checkbox"/> IF491(TK14)	Flap <input type="checkbox"/> None
	<input type="checkbox"/> 5mm
	<input type="checkbox"/> 8mm
	<input checked="" type="checkbox"/> Holes

memo:

スプリングは変更の余地あり
フロント:ライトブルーS
リヤ:ライトブルーL