


Name Kohta AKimoto Date 15/06/07 Truck / City YATABE ARENA Event Pre world&JMRCA

Front Suspension



Upper Spacer: 1 mm




4.8mm Ball Stud: Camber: 1.5°
 UM128(Std.)
 UMW508 (+2mm High Mount)

4.8mm Ball Stud Spacer: 1 mm

AL. Steering Support:

None
 UMW724



4.8mm Ball Stud:

LA246 (-1mm Low Mount)
 97050M (Std)

Axle Spacer:

Out 1 mm
 In 2 mm

+*Clank Height Spacer down(5x7x1)
 Ackerman Steer Spacer: 0 mm

*Ackerman arrow back 0 mm
 UMW701 Aluminum ST Plate
 UMW702 Aluminum Clank Arm

Wheel Hub:


UM569 / Std
 UM506

Axle Height Spacer:

 mm
 1.5 mm

Bump Steer Spacer:

0 mm




Toe: In Out 0.5°

Tie Rod:

Front Bulkhead Weight Placement:

None
 Bulkhead Inside 5 oz 5 g
 On the skid plate oz g * 1oz=28g

Caster:



25°
 30°

Spacer:

A (UM502) B(UMW722/Brass)
 B (UM721/Std) B(UMW723/Alu) None 4°

Caster Block:


0.5 0°
 1.0 2°

Caster Block Position:

IN (wide/Std)
 OUT (Narrow)


Wheelbase: F: 1 mm R: 0 mm

Rear Suspension



Sus Holder Spacer:

F 0.5 1.0 None
 R 0.5 1.0 None



Anti-Squat: 2°

Upper Spacer:

1 mm

Wheelbase:


F: 4 mm
 R: 0 mm

4.8mm Ball Stud:

UM129
 UMW508 (+2mm High Mount)
 97050M
 UM128(Std.)

Upper Spacer: 2 mm

Universal Swing Shaft:

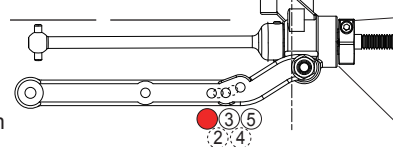

Camber: 1.5°

Drive Hub :

4mm (TFW113)
 4.5mm (LAW30GM/Std.)
 5.2mm (UMW523)

Axle Spacer:

Out mm
 In 0.3 mm

Wheelbase:

F: 2 mm
 R: 0 mm


Sway Bar:

None
 1.4 mm


Rear Hub Carrier :

0°Type-B (UM519)
 0°Type-B2 (UM519-2)
 0° Alu (UMW704-0)
 0.5°Alu (UMW704-05)
 1°Alu (UMW704-1)

RR:



Mid:



Lower Sus. Holder:

(Opt/Adjustable)
 UMW705(RF/Alu) out D Block
 UMW725(RF-MID/Bra) Block (Opt/Adjustable)
 UMW706(RR-RWD) Block
 UMW707(RR-MID) out D Block

Motor Position


Rear Motor
 Midship Motor

Diff.

Gear Diff. # 5000
 Ball Diff.


Shock

Shock Piston:	Front <u>2x1.6</u>	Rear <u>2x1.6</u>	*W5303-09
Shock Oil:	# <u>550</u>	# <u>500</u>	
Shock Spring:	<u>Yellow</u>	<u>Orange</u>	
Limiters:	in <u>0</u> mm out <u>0</u> mm	in <u>0</u> mm out <u>0</u> mm	
Shock Length(A):	<u>19.0</u> mm	<u>28.0</u> mm	
O-ring:	<u>Xring clear</u> *ORG03X	<u>Xring clear</u> *ORG03X	
Shock Top type:	<input checked="" type="checkbox"/> Alu(UM719/Std)	<input type="checkbox"/> UM753-1	
Ball End type:	Front: <input type="checkbox"/> S <input type="checkbox"/> M <input checked="" type="checkbox"/> L	Rear: <input type="checkbox"/> S <input checked="" type="checkbox"/> M <input type="checkbox"/> L	



Battery Placement:

None
 Screw



Foam:


Front
 Rear
 None

Battery Type

Straight
 Separate
 Short

Type: ORION 4000

Chassis

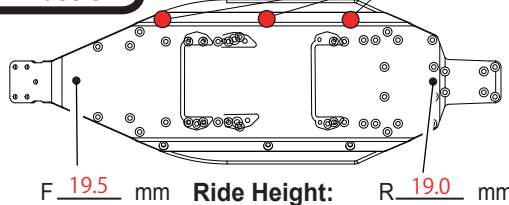

F 19.5 mm Ride Height: R 19.0 mm

Other

Motor: ORIONVST2 6.5TLW
 ESC: Much more FLETA PRO
 Pinion/Spur: 23/82

Truck Condition

Smooth Sandy
 Bumpy Soft Dirt
 Low Truction Grass
 Med. Truction Blue Groore
 Higt Truction Clay
 Wet Dusty
 Dry Other
Astro turf

Wing

Wing Mount : Narrow Wide
 Wing Angle : 4° 7° 10°
 Blast-S
 Blast-L
 Step-S
 Step-M
 Step-L
 Step 2.0
 Step 3.0
 Straight
 Round
 Lip : 0mm

Tire

Tire:	Front <u>U6592</u>	Rear <u>U6558</u>	Traction Compound or comment:
Inserts:	<u>None</u>	<u>U6734</u>	
Wheel:	<u>W5029W</u>	<u>W5202W</u>	

Comment

UMB03LW Blade Body (Lightweight) UMW720 Lightweight Main Chassis
UMW726 Aluminum gear diff case cap