



Name	下 高章	Temp	°C	Engine	OS SPEED 12X2 SPEC III	Muffler	OS T-1070
Date	2013-03-03	Humidity	%	Head Clearance	mm	Fuel Type	コスモ 16%
Track	ACE	Traction	良い %	Plug No.	RP.6	Radio	Futaba 4PKDR

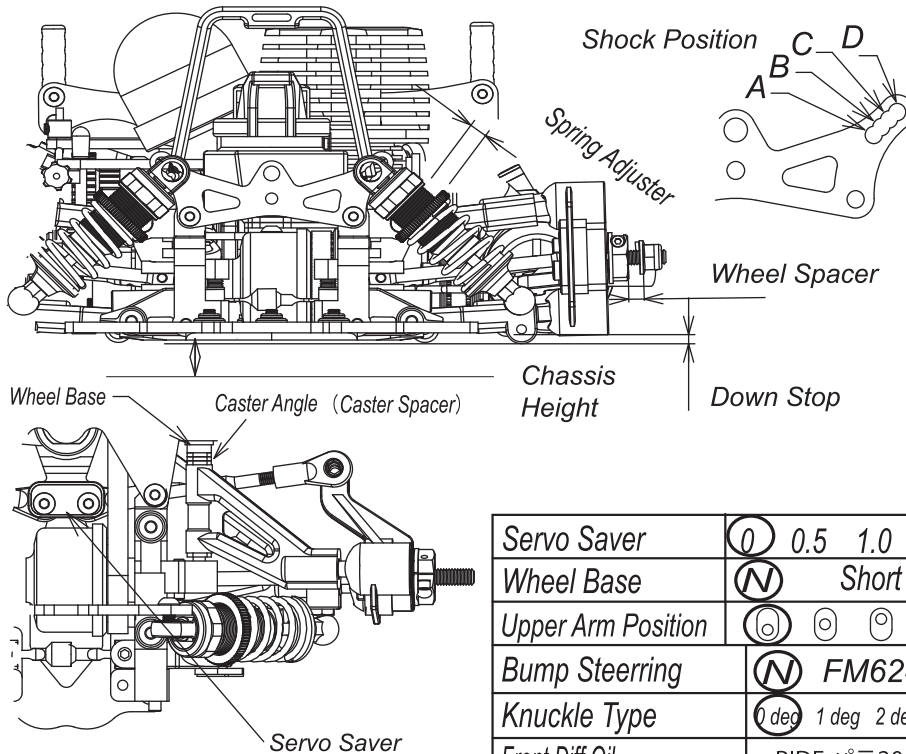

Servo Saver	0 0.5 1.0
Wheel Base	N Short
Upper Arm Position	0 0 0
Bump Steering	N FM624
Knuckle Type	0 deg 1 deg 2 deg
Front Diff Oil	RIDE パテ20

Shock Oil	300 350 400 450 500 550 600 700 800
Diaphragm	N
Shock Piston	N
Spring	RIDE グリーン
Spring Adjuster	mm
Shock Position	A B C D
Caster Angle (Spacer)	3 mm
Camber Angle	L 0 0.5 1 1.5 2 2.5 3 R 0 0.5 1 1.5 2 2.5 3
Toe Angle	-1.5 deg
Front Width	199 mm
Down Stop	0 mm
Wheel Spacer	0 mm
Antiroll Bar	VZ084SS Super Soft / VZ084S Soft / Sway (φ Bar mm)
Tire	ZBB-812CCH / deg
Wheel Offset Type	mm
Tire Diameter	φ 61 mm
Chassis Height	7 mm
Used Optional parts	

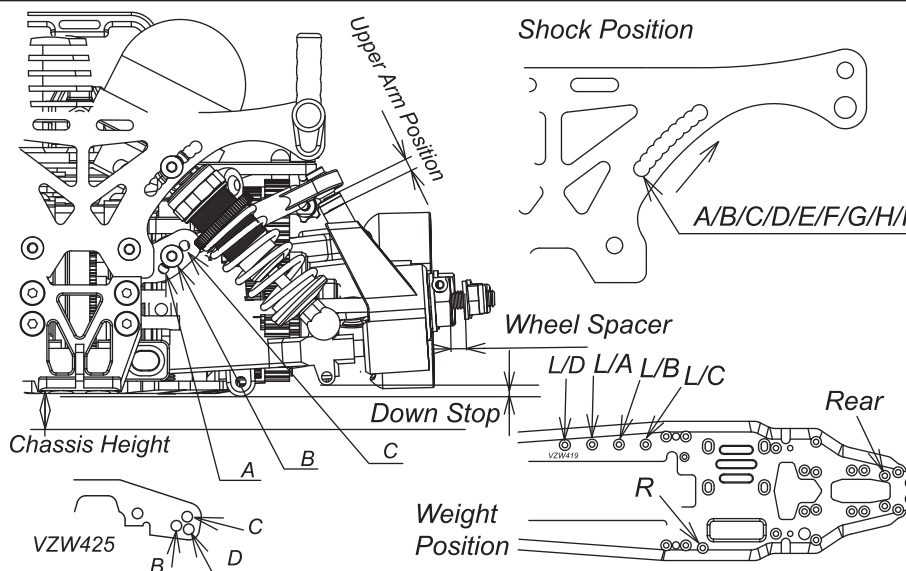

Gear	Total	Gear	Total	Gear	Total	Gear	Total	Gear	Total	Gear	Total
16	61	7.63	16	60	7.50	16	59	7.38	21	56	5.33
17	61	7.18	17	60	7.06	17	59	6.94	22	56	5.09
							59		23	56	4.87

Shock Oil	300 350 400 450 500 550 600 700 800
Diaphragm	N
Shock Piston	N
Spring	RIDE ブルー
Spring Adjuster	0 mm
Shock Position	A(B)C/D/E/F/G/H/I
Wheel Spacer	0 mm
Upper Arm Position	2 mm 外下 A / B / C / D
Camber Angle	L 0 0.5 1 1.5 2 2.5 3 3.5 4 R 0 0.5 1 1.5 2 2.5 3 3.5 4
Toe Angle	+3 deg
Rear Width	199.5 mm
Down Stop	0 mm
Antiroll Bar	N 2 mm
Tire	ZBB-9121CH / deg
Wheel Offset Type	mm
Tire Diameter	φ 63 mm
Chassis Height	7.5 mm

Clutch Type	N (VZW229)	Pinion Gear	(15) 16 / (20) 21 22 23
Clutch Shoe	N / VZW229-03Y Yellow	Spur Gear	59 60 61 / 54 55 56
Clutch Weight	N / Other ()	Drive Ratio	0mm Difference (24T Pulley 387Belt) 2.5mm Difference (23T Pulley 384Belt)
Clutch Spring	N (□ 1.7 VZW446 □ 1.8)	Rear Diff Oil	50000
Clearance	0.7 mm	Main Chassis	N (VZ437) / VZW419
Adjust Nut	1.4 mm	Body-Shell	P-37N

Memo オプションシャシー、フロントバンパー固定、リアデフ上アルミ、リアユニバーサルアルミ

フロントボディマウント内側