



Name	高畑 翔暉	Temp	°C	Engine	O.S. SPEED 12XZ Spec. III	Muffler	
Date	2013.6.30	Humidity	%	Head Clearance	mm	Fuel Type	NASA 16%
Track	ホクセイ	Traction	%	Plug No.	O.S. RP6	Radio	Futaba 4PKSR

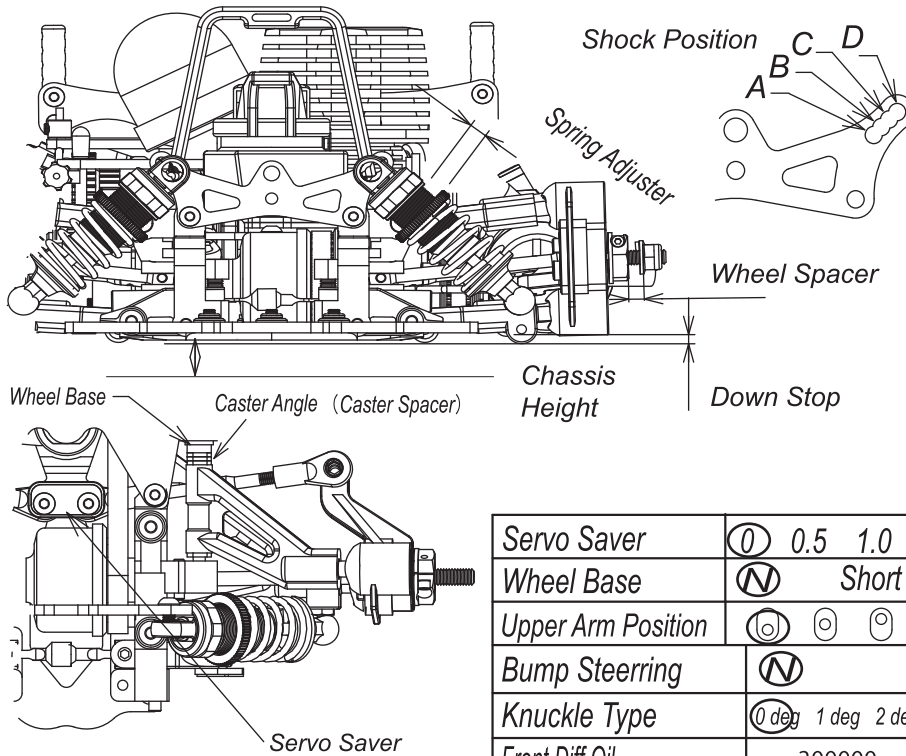

Servo Saver	① 0.5 1.0
Wheel Base	④ Short
Upper Arm Position	① ② ③
Bump Steering	④
Knuckle Type	① deg 1 deg 2 deg
Front Diff Oil	300000

Shock Oil	300 350 ④ 450 500 550 600 700 800
Diaphragm	④
Shock Piston	④
Spring	KYOSHO ライトブルー
Spring Adjuster	mm
Shock Position	④ B C D
Caster Angle (Spacer)	3 mm
Camber Angle 0G/1G	L 0 0.5 ① 1.5 2 2.5 3 R 0 0.5 ① 1.5 2 2.5 3
Toe Angle	-1 deg
Front Width	199.5 mm
Down Stop	0 mm
Wheel Spacer	0 mm
Antiroll Bar	VZ084SS Super Soft ④ / Sway (φ mm) VZ084S Soft
Tire	Tabata スーパーハード-812 / deg
Wheel Offset Type	mm
Tire Diameter	φ 63.5 mm
Chassis Height	8 mm
Used Optional parts	

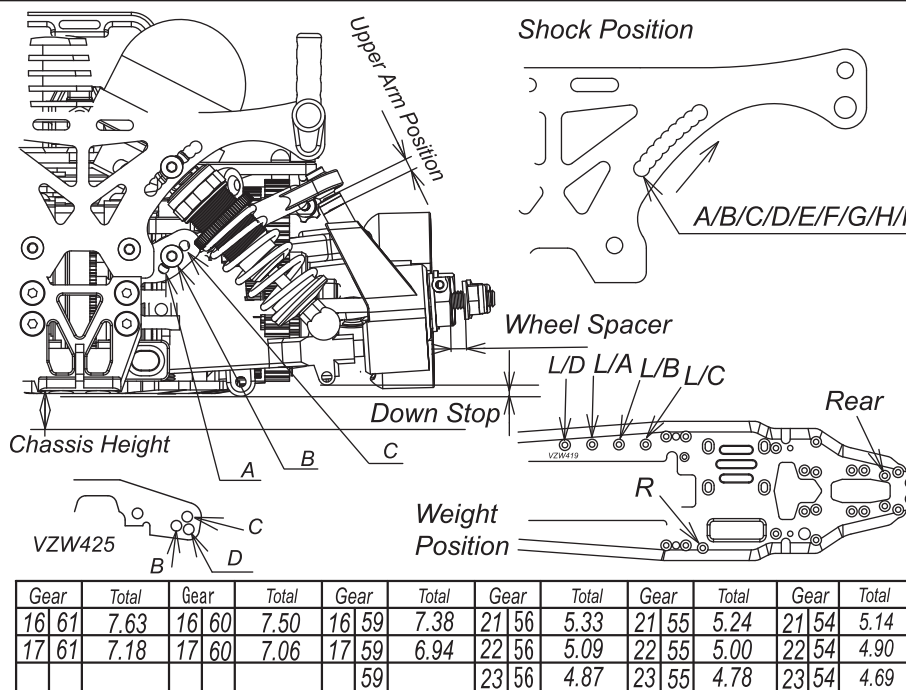

Gear	Total	Gear	Total	Gear	Total	Gear	Total	Gear	Total	Gear	Total
16	61	7.63	16	60	7.50	16	59	7.38	21	56	5.33
17	61	7.18	17	60	7.06	17	59	6.94	22	56	5.09
							59		23	56	4.87
									23	55	4.78
									23	54	4.69

Shock Oil	300 350 ④ 450 500 550 600 700 800
Diaphragm	④
Shock Piston	④
Spring	KYOSHO ライトブルー
Spring Adjuster	mm
Shock Position	A/B/C/D/E/F/G/H/I
Wheel Spacer	0 mm
Upper Arm Position	2.1 mm 外
Camber Angle 0G/1G	L 0 ④ 1 1.5 2 2.5 3 3.5 4 R 0 ④ 1 1.5 2 2.5 3 3.5 4
Toe Angle	3 deg
Rear Width	199.5 mm
Down Stop	0 mm
Antiroll Bar	④ mm
Tire	Tabata スーパーハード / 37 deg
Wheel Offset Type	mm
Tire Diameter	φ 65 mm
Chassis Height	9 mm
Lower Arm Position	④ (ZERO) ④ (OUT 1mm) ④ / UP mm
Weight	L(A/B/C/D)/R/Rear VZW419
Wheel Base	④ Short
Body-Shell	PF P37-N

Clutch Type	④ (VZW229)	Pinion Gear	(15) 16 ④ (20) 21 ④ 23
Clutch Shoe	N / VZW229-03Y Yellow	Spur Gear	59 60 ④ 55 56
Clutch Weight	④ Other ()	Drive Ratio	0mm Difference(24T Pulley 387Belt) 2.5mm Difference(23T Pulley 384Belt)
Clutch Spring	N (φ 1.7) ④ ④ (φ 1.8)		
Clearance	0.7 mm	Rear Diff Oil	50000
Adjust Nut	1.6 mm	Main Chassis	④ (VZ437) / VZW419

Memo ・リヤアッパースバルク ・フロントカーボンバンパー