



|       |  |          |    |                |    |           |  |
|-------|--|----------|----|----------------|----|-----------|--|
| Name  |  | Temp     | °C | Engine         |    | Muffler   |  |
| Date  |  | Humidity | %  | Head Clearance | mm | Fuel Type |  |
| Track |  | Traction | %  | Plug No.       |    | Radio     |  |

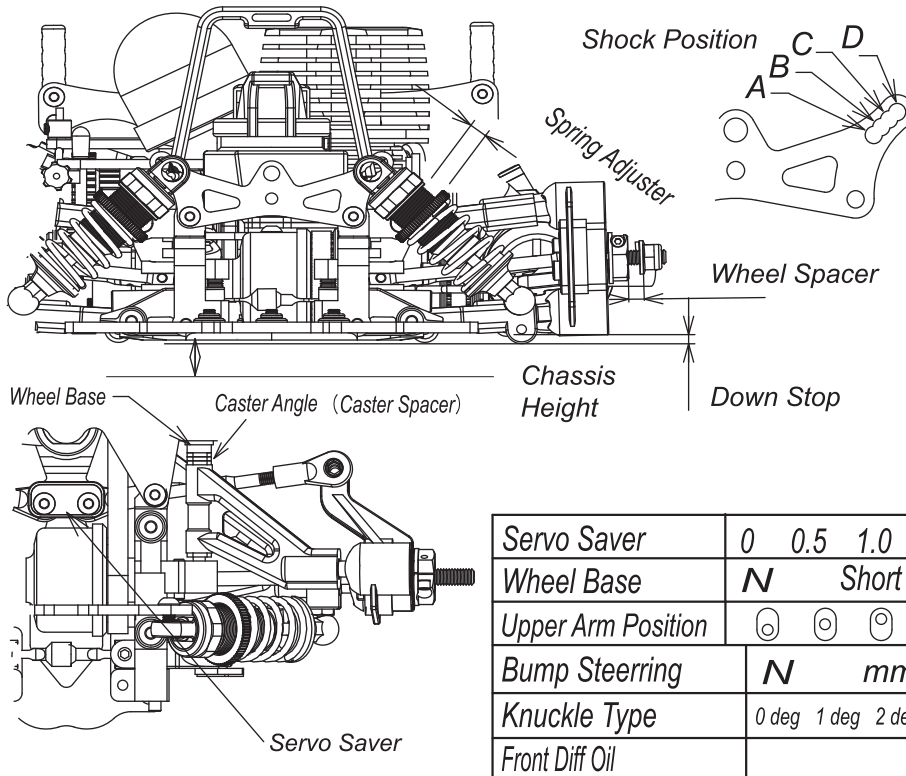

|                    |                   |
|--------------------|-------------------|
| Servo Saver        | 0 0.5 1.0         |
| Wheel Base         | N Short           |
| Upper Arm Position | ⊙ ⊙ ⊙             |
| Bump Steering      | N mm              |
| Knuckle Type       | 0 deg 1 deg 2 deg |
| Front Diff Oil     |                   |

|                       |                                                           |
|-----------------------|-----------------------------------------------------------|
| Shock Oil             | 300 350 400 450 500 550 600 700 800                       |
| Diaphragm             | N                                                         |
| Shock Piston          | N                                                         |
| Spring                |                                                           |
| Spring Adjuster       | mm                                                        |
| Shock Position        | A B C D                                                   |
| Caster Angle (Spacer) | mm                                                        |
| Camber Angle 0G/1G    | L 0 0.5 1 1.5 2 2.5 3<br>R 0 0.5 1 1.5 2 2.5 3            |
| Toe Angle             | deg                                                       |
| Front Width           | mm                                                        |
| Down Stop             | mm                                                        |
| Wheel Spacer          | mm                                                        |
| Antiroll Bar          | VZ084SS Super Soft <input type="radio"/> / Sway(φ Bar mm) |
| Tire                  | / deg                                                     |
| Wheel Offset Type     | mm                                                        |
| Tire Diameter         | mm                                                        |
| Chassis Height        | mm                                                        |
| Used Optional parts   |                                                           |

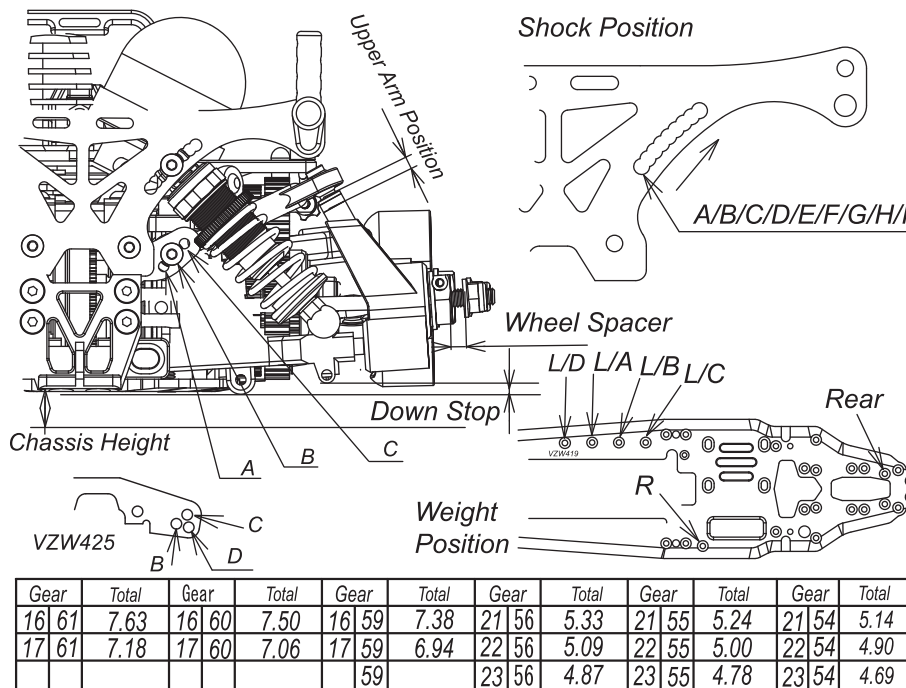

|                    |                                                            |
|--------------------|------------------------------------------------------------|
| Shock Oil          | 300 350 400 450 500 550 600 700 800                        |
| Diaphragm          | N                                                          |
| Shock Piston       | N                                                          |
| Spring             |                                                            |
| Spring Adjuster    | mm                                                         |
| Shock Position     | A/B/C/D/E/F/G/H/I                                          |
| Wheel Spacer       | mm                                                         |
| Upper Arm Position | mm A/B/C/D VZW425                                          |
| Camber Angle 0G/1G | L 0 0.5 1 1.5 2 2.5 3 3.5 4<br>R 0 0.5 1 1.5 2 2.5 3 3.5 4 |
| Toe Angle          | deg                                                        |
| Rear Width         | mm                                                         |
| Down Stop          | mm                                                         |
| Antiroll Bar       | N mm                                                       |
| Tire               | / deg                                                      |
| Wheel Offset Type  | mm                                                         |
| Tire Diameter      | mm                                                         |
| Chassis Height     | mm                                                         |

|               |                       |               |                                                                            |
|---------------|-----------------------|---------------|----------------------------------------------------------------------------|
| Clutch Type   | N (VZW229)            | Pinion Gear   | (15) 16 17 / (20) 21 22 23                                                 |
| Clutch Shoe   | N / VZW229-03Y Yellow | Spur Gear     | 59 60 61 / 54 55 56                                                        |
| Clutch Weight | N / Other ( )         | Drive Ratio   | 0mm Difference(24T Pulley 387Belt)<br>2.5mm Difference(23T Pulley 384Belt) |
| Clutch Spring | N (□1.7)/VZ446 (□1.8) |               |                                                                            |
| Clearance     | mm                    | Rear Diff Oil |                                                                            |
| Adjust Nut    | mm                    | Main Chassis  | N (VZ437) / VZW419                                                         |

|                    |                                 |
|--------------------|---------------------------------|
| Chassis Height     | mm                              |
| Lower Arm Position | ⊙(ZERO) ⊙(OUT 1mm)<br>N / UP mm |
| Weight             | L(A/B/C/D)/R/Rear VZW419        |
| Wheel Base         | N Short                         |
| Body-Shell         |                                 |

Memo