



Name Yusuke Sugiura Date 15/06/07 Truck / City YATABE ARENA Event Pre world & JMRC A

Front Suspension:

Shock Position:



Upper Arm Position:



4.8mm Ball Stud:


- 97050M(Std)
 UM129

Upper Spacer: 0 mm

Camber 2.0 °

Bump Steer Spacer:

2 mm
 In
 Out 0 °




Sway Bar:

- None
 2.0 mm (Proto type)

Ackerman Spacer:

0 mm




Lower Sus Holder Block:

Front INB Rear INC

Lower Sus Holder Spacer:

Front 1.0 mm Rear 0 mm

Comments:

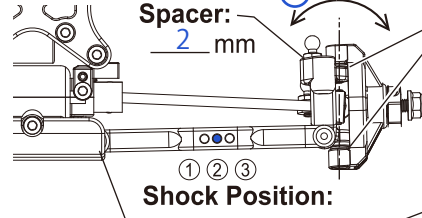

Shock Position:

Axle-Height Spacer:

- Up
 Down

Caster Block:

- 7°
 10°

Wheelbase:

Front 0 mm
 Rear 1 mm

Front Diff:


- Gear Diff. # 10000
 Ball Diff.

Rear Suspension:

Shock Position:



Upper Arm Position:




4.8mm Ball Stud:

- 97050M(Std)
 UM129

Upper Spacer: 0 mm

Camber 2.0 °

Hub Carrier:



- 0°Type-B(UM519)
 0°Type-B2(UM519-2)
 0°Alu(UMW704-0)
 0.5°Alu(UMW704-0.5)
 1°Alu(UMW704-1)

Sus. Arm:

- LA272(Std)
 UM713B

Upper Spacer: 0 mm

Sway Bar:

- None
 2.0 mm (Proto type)


Lower Sus Holder Block:

Front INE Rear INB

Lower Sus Holder Spacer:

Front 0 mm Rear 0 mm

Comments:

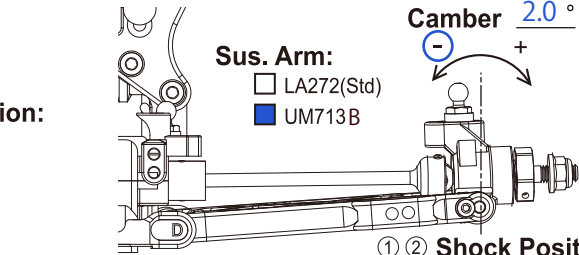

Shock Position:

Toe In: _____ °

Wheelbase:

Front: 4 mm Front: 2 mm
 Rear: 0 mm Rear: 0 mm

Slipper Type:


- Separates
 Direct

Rear Diff:

- Gear Diff. # 10000
 Ball Diff.


Shock:

	Front	Rear
Shock Piston:	<u>2x1.7</u>	<u>2x1.6</u> ※W5303-09
Shock Oil:	# <u>42.5</u>	# <u>35 (LOSI OIL)</u>
Shock Spring:	<u>GOLD</u>	<u>YELLOW</u>
Limiters:	in <u>0</u> mm out <u>0</u> mm	in <u>0</u> mm out <u>0</u> mm
Shock Length(A):	<u>19.5</u> mm	<u>28.5</u> mm
Shock Top Type:	<input checked="" type="checkbox"/> Alu(UM719/Std) <input type="checkbox"/> UM753-1	
5.8mm Ball End:	Front: <input type="checkbox"/> S <input checked="" type="checkbox"/> M <input type="checkbox"/> L Rear: <input type="checkbox"/> S <input checked="" type="checkbox"/> M <input type="checkbox"/> L	



Chassis:

Ride Height:

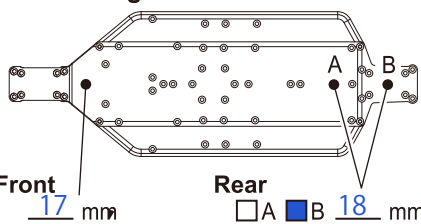

Front 17 mm

Rear A B 18 mm

Tire:

	Front	Rear
Tire:	<u>U6810</u>	<u>U6558</u>
Inserts:	<u>U6733</u>	<u>U6734</u>
Wheel:	<u>W5201W</u>	<u>W5202W</u>
Traction Compound:		

Electronics:

- Battery: Saddle Pack
 Short
- Motor Position: Front
 Rear
- Servo Mounting: Straight
 Sideways
- Motor: Muchmore FLETA ZX5.0
- Motor Timing: _____
- Pinion/Spur: 18/78
- ESC: Much more FLETA PRO
- Radio: SANWA M12S
- Servo: SANWA SRG-BR

Body / Wing:

Body: LAB06LW Wing Mount: Narrow Wide Wing Dum Height: 15.0 mm

Wing: X-Gear FASHION WING Wing Angle: 4° 7° 10° Lip Height: 8 mm

Material:

- Screw: Steel Titanium
- Pinion Gear: Steel Aluminium
- Shock O-Ring: O-ring X-ring Red Clear

Comment: ※LAW50 Gear Diff set

※LAW52 Carbon Composite Front Stiffener Set

※LAW53 Carbon Composite Rear Stiffener Set

※LAW54 Aluminum HD Main Chassis Conversion Set