


LAZER ZX6.6 SET UP SHEET



Name Kohta Akimoto Date 17/06/04 Truck / City Yatabe Arena(Carpet) Event For 2017 Japan nationals

Front Suspension:

Shock Position:



Shock Stay:
 Std.
 Carbon (LAW58)
 Other

Lower Sus Holder Block:


Front inB Rear In B

Lower Sus Holder Spacer:

Front 1 mm Rear 0 mm

Comments: _____

Upper Arm Position:



4.8mm Ball Stud:

97050M(Std)
 UM129

Upper Spacer:

0 mm

Camber

1 °

Bump Steer Spacer:

1 mm

Toe:


In
 Out 0.5 °

Sway Bar:

None
 1.8 mm

Ackerman Spacer:

1 mm

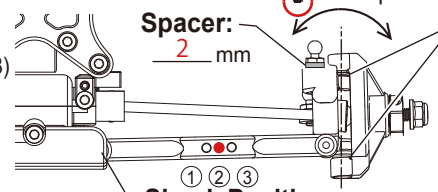

Shock Position:

Wheelbase:

Front 0 mm
 Rear 1 mm

Axle-Height Spacer:

Up
 Down

Caster Block:

7°
 10°

Stiffener:

Std.
 Carbon Comp. (LAW52)


Front Diff:

Gear Diff. # 10,000

Ball Diff.

Rear Suspension:

Shock Position:



Shock Stay:
 Std.
 Carbon (LAW59)
 Other

Wing Stay Position:

Lower Sus Holder Block:


Front In C Rear Out C

Lower Sus Holder Spacer:

Front 0.5 mm Rear 0.5 mm

Comments: _____

Upper Arm Position:



4.8mm Ball Stud:

97050M(Std)
 UM129
 LA246 (-1mm Low)

Upper Spacer:

0 mm

Toe In:

2 °

Camber

1 °

Sus. Arm:

LA272(Std)
 UM713B
 UMW711B

Hub Carrier:

Type-B (UM519)
 Type-B2 (UM519-2)
 0°Alu(UMW704-0)
 0.5°Alu(UMW704-05)
 1°Alu(UMW704-1)

Upper Spacer:


2 mm

Sway Bar:

None
 1.8 mm

Center Plate:

Std.
 Aluminum (LAW55)

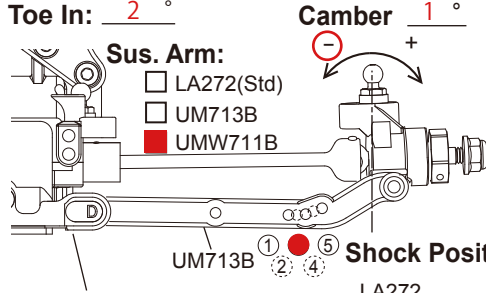

Shock Position:

Wheelbase:

Front 2 mm
 Rear 0 mm

Wheelbase:

Front: 1 mm
 Rear: 3 mm

Center Drive :

Diff. Gear Slipper Clutch
 Separates
 Direct

Rear Diff:

Gear Diff. # 10,000

Ball Diff.

Shock:

Shock Piston: 2x1.6(W5303-09) 2x1.6(W5303-09)

Shock Oil: # 650 # 600


Shock Spring: Red Red

Limiters: in out 0 mm in out 0 mm


Shock Length (A): 20 mm 28 mm

Shock Top Type: Alu. (UM719/Std) UM753-1

5.8mm Ball End:



Chassis:

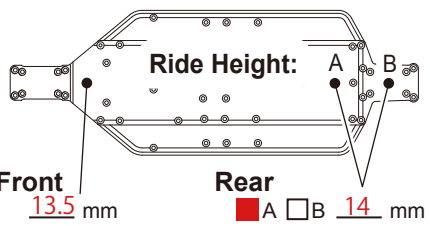

Tire:

Front YAU-6810 Rear YAU-6826

Compound: YAU-6733 YAU-6734

Wheel: W5201W W5202W

Note: _____

Electronics:

Battery: Saddle Pack
 Short

Motor Position: Front
 Rear

Servo Mounting: Straight
 Sideways
 Aluminum (LAW56)

Motor Mount Position:
 Std 8mm Front

Battery Position:
 Std 8mm Front

Motor: ORION VST2LW 5.5T

Pinion / Spur: 19/78

ESC: ORION R10.1

Body / Wing:

Body: BLADE LW Wing Mount: Narrow Wide Wing Dum Height: 15 mm

Wing: PL Champion 6.5 Wing or Step 3.0 Wing Wing Angle: 4° 7° 10° Lip Height: 10 mm

Material:

Screw: Steel Titanium

Pinion Gear: Steel Aluminum

Shock O-Ring: O-ring X-ring Red Clear

Comment :

LAW50 Gear Diff Set
 LAW57 Stabilizer Set
 LAW60 HCG Front Upper Bulk
 LAW61 HCG Rear Upper Bulk
 LAB06LW Blade Body (LAZER ZX6/0.6t)

Truck Condition

Smooth Sandy
 Bumpy Soft Dirt
 Low Truction Grass
 Med. Truction Blue Groore
 Higt Truction Clay
 Wet Dusty
 Dry Carpet