


LAZER ZX7 SET UP SHEET



Name 秋元 宏太 Date 19/12/15 Truck / City チャンプスタジアム相模原 Event 月例12月戦 約15°C


Front Suspension:

Shock Position:



- Shock Stay:**
- Std.
 - Carbon (LAW58)
 - Other Low down type LAW70

Upper Arm Position:




- 4.8mm Ball Stud:**
- UM129(Std)
 - 97050M

Upper Spacer: 0.5 mm

Camber 2 °

Bump Steer Spacer:



- Toe:**
- In
 - Out 1 °


- Sway Bar:**
- None
 - 1.4 mm

Lower Sus Holder Block:

Front In_C Rear In_C

Lower Sus Holder Spacer:

Front 1.5 mm Rear 1.5 mm

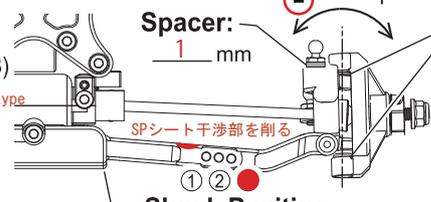

Shock Position:

Wheelbase: Front 1.2 mm Rear 1 mm

Axle-Height Spacer:


- Up
- Down

Caster Block:

- 7° 13°
- 10°

Sus. Bush:

- Wide
- Narrow(Std)

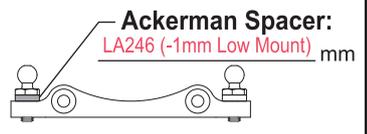


Front Diff:

- Gear Diff.
- # 5,000


Rear Suspension:

Shock Position:



- Shock Stay:**
- Std.
 - Carbon (LAW59)
 - Other

Upper Arm Position:




- 4.8mm Ball Stud:**
- 97050M(Std)
 - UM129

Upper Spacer: 1 mm


Camber 2 °

Hub Carrier:



Upper Spacer: 0 mm

- Sus. Arm:**
- LA272
 - UM713B
 - UM762(Std)

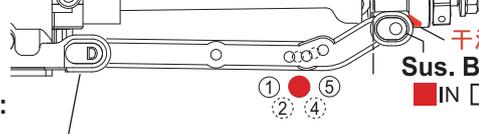

Wheelbase: Front 2 mm Rear 0.2 mm

Universal Swing shaft 62.5 mm

Axle Shaft: 3本線

Axle Spacer: Out 1 mm In 1.3 mm

Center Drive :

- Slipper Clutch
- Diff. Gear
- # 300,000

- 0°Type-B(UM519)
- 0°Type-B2(UM519-2)
- 0°Alu(UMW704-0)
- 0.5°Alu(UMW704-05)
- 1°Alu(UMW704-1)

- Sway Bar:**
- None
 - 1.4 mm


Drive Hub : 5.2mm (UMW523)

Rear Diff:


- Gear Diff.
- # 5,000

Shock:


	Front	Rear
Shock Piston:	<u>2x1.6</u>	<u>2x1.7</u>
Shock Oil:	# <u>500</u>	# <u>450</u>
Shock Spring:	<u>Gold</u>	<u>Gold</u>
Limiters:	in <u>0</u> mm out <u>0</u> mm	in <u>0</u> mm out <u>0</u> mm
Shock Length (A):	<u>21.5</u> mm	<u>28.5</u> mm
Shock Top Type:	<input type="checkbox"/> Alu. (UM719)	<input checked="" type="checkbox"/> UM753-1B(Std.)




Ball End:

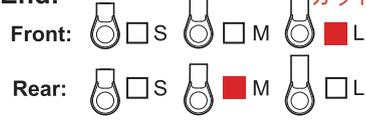

Spring Sheet:



Chassis:

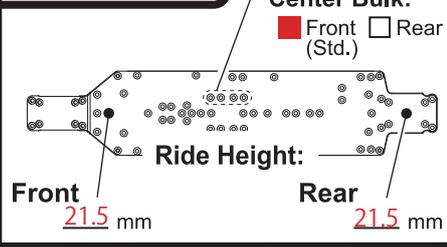

- Center Bulk:**
- Front
 - Rear (Std.)

Front 21.5 mm

Rear 21.5 mm

Electronics:

Motor: ORION ULTIMATE 6.5T

Pinion / Spur: 19/78

ESC: ORION HMX 10

Radio: FUTABA 7PXR


Servo: FUTABA CT700

Battery: ORION 4000LGG CHARGE 4.0A 8.26V CUT

Tire:

	Front	Rear
Tire:	<u>PL-ELECTRON or Panther</u>	<u>PL-ELECTRON or Panther</u>
Compound:	<u>MC・クレイ</u>	<u>MC・クレイ</u>
Inserts:	<u>Std or BMAX黒</u>	<u>Std or BMAX黒</u>
Wheel:	<u>W5201WB</u>	<u>W5202WB</u>

Body / Wing:

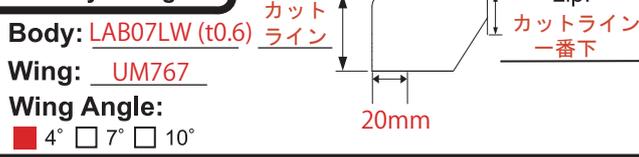

Material:

- Screw:** Steel Titanium
- Pinion Gear:** Steel Aluminum
- Shock O-Ring:** O-ring X-ring Red Clear

Comment :

LAW71 カーボンフロントロアブレース
 LAW72 カーボンリヤロアブレース
 LAW75 チャンピスセット
 LAW77 アルミセンターシャフト 71.5
 LAW79 アルミセンターシャフト 88
 UMW751 バッテリーウェイト32g
 LAW80 バッテリーポストセット
 (0リング固定式用) 1月下旬頃発売予定!

Truck Condition

- Smooth
- Bumpy
- Low Truction
- Med. Truction
- Higt Truction
- Wet
- Dry
- Sandy
- Soft Dirt
- Grass
- Blue Groore
- Clay
- Dusty
-