


# LAZER ZX7 SET UP SHEET



Name 秋元 宏太 Date 19/12/09 Truck / City 谷田部アリーナカーペット Event 約10℃

### Front Suspension:

#### Shock Position:



- Shock Stay:**
- Std.
  - Carbon (LAW58)
  - Other Low down type LAW70


#### Lower Sus Holder Block:

Front Out\_B Rear Out\_B

#### Lower Sus Holder Spacer:

Front 1.0 mm Rear 1.0 mm

#### Upper Arm Position:



#### 4.8mm Ball Stud:

- UM129(Std)
- 97050M

#### Upper Spacer:

1 mm

#### Camber

2 °

#### Bump Steer Spacer:

1 mm

#### Toe:

- In
- Out 1 °

#### Sway Bar:

- None
- 2.0 mm LAW57

#### Ackerman Spacer:

LA246 (-1mm Low Mount) mm

#### Spacer:

1 mm

#### Axle-Height Spacer:

- Up
- Down

#### Caster Block:

- 7°  13°
- 10°

#### Shock Position:

SPシート干渉部を削る

#### Wheelbase:

Front 1.2 mm Rear 1 mm

#### Sus. Bush:


- Wide
- Narrow(Std)

#### Front Diff:

- Gear Diff.
- # 10,000

### Rear Suspension:

#### Shock Position:



- Shock Stay:**
- Std.
  - Carbon (LAW59)
  - Other

#### Wing Stay Position:


#### Lower Sus Holder Block:

Front IN\_B Rear IN\_E Toe In: 1.5

#### Lower Sus Holder Spacer:

Front 0 mm Rear 0 mm

#### Upper Arm Position:



#### 4.8mm Ball Stud:

- 97050M(Std)
- UM129


#### Upper Spacer:

0 mm フルバンプ時干渉部削る

#### Camber

2 °

#### Hub Carrier:



- Type-B (UM519)
- Type-B2 (UM519-2)

#### Upper Spacer:

0 mm

#### Sus. Arm:

- LA272
- UM713B
- UM762(Std)

#### Sus. Bush:

- IN
- OUT (Std.)

#### Wheelbase:

Front: 1 mm Rear: 3 mm

#### Wheelbase:

Front 2 mm Rear 0.2 mm

#### Universal Swing shaft

65.5 mm

#### Axle Shaft:

3本線

#### Axle Spacer:

Out 1 mm In 1.3 mm

#### Center Drive :

- Slipper Clutch
- Diff. Gear
- # \_\_\_\_\_

- 0°Type-B(UM519)
- 0°Type-B2(UM519-2)
- 0°Alu(UMW704-0)
- 0.5°Alu(UMW704-05)
- 1°Alu(UMW704-1)

- Sway Bar:**
- None
  - 2.0 mm LAW57

- Drive Hub :**
- 5.2mm (UMW523)

#### Rear Diff:

- Gear Diff.
- # 10,000

### Shock:

#### Shock Piston:

Front 2x1.6 Rear 2x1.7

#### Shock Oil:

# 600 # 550

#### Shock Spring:

Yellow Red

#### Limiters:

in out 0 mm in out 0 mm


#### Shock Length (A):

21.5 mm 28.5 mm


#### Shock Top Type:

- Alu. (UM719)
- UM753-1B(Std.)


#### Ball End:



#### Spring Sheet:



### Chassis:

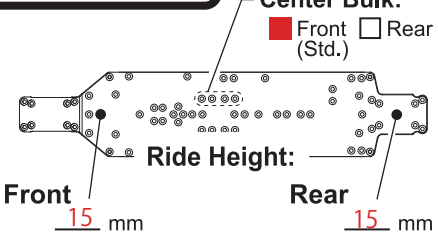

#### Center Bulk:

- Front
- Rear (Std.)

#### Front

15 mm

#### Rear

15 mm

### Electronics:

- ORION
- Motor: ULTIMATE 4.5T
- Pinion / Spur: 18/78
- ESC: ORION HMX 10
- Radio: FUTABA 7PXR
- Servo: FUTABA CT700
- Battery: ORION 4000LGG  
CHARGE 4.0A 8.40V CUT

### Tire:

	Front	Rear
Tire:	<u>カクタスフュージョン</u>	<u>カクタス</u>
Compound:	<u>イエロー</u>	<u>イエロー</u>
Inserts:	<u>U6733</u>	<u>U6734</u>
Wheel:	<u>W5201WB</u>	<u>W5202WB</u>

### Body / Wing:

#### Body:


LAB07LW (t0.6)

#### Wing:

UM767

#### Wing Angle:

- 4°  7°  10°

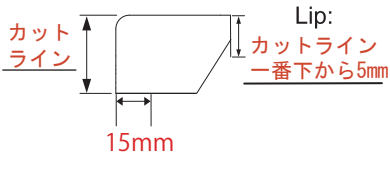

### Comment :

- UMW742 カーボンコンポジットリヤサスアームセット (RB7)
- UMW751 バッテリーウェイト32g
- LAW60 HCGフロントアッパ-パルク (ZX6/ZX6.6)
- LAW71 カーボンフロントロアブレース
- LAW72 カーボンリヤアブレース
- LAW73 カーボンコンポジットフロントサスアーム (ZX7)
- LAW74 HCGリヤアッパ-パルク (ZX7)
- LAW75 チタンビスセット
- LAW76 アルミセンターシャフト 77.5
- LAW78 アルミセンターシャフト 68.5
- LAW80 バッテリーポストセット (0リング固定式用) 1月下旬頃発売予定!

### Material:

- Screw:  Steel  Titanium

#### Pinion Gear:

- Steel
- Aluminum

#### Shock O-Ring:

- O-ring
- X-ring
- Red
- Clear