

# LAZER ZX7 SET UP SHEET



Name Kohta Akimoto Date 18/12/27 Truck / City CHAMP STADIUM Event Indoor • Clay • Bumpy Low Truaction

## Front Suspension:

### Shock Position:



### Shock Stay:

- Std.
- Carbon (LAW58)
- Other Low down type **LAW70 coming soon**

### Lower Sus Holder Block:

Front Out\_B Rear Out\_B

### Lower Sus Holder Spacer:

Front 0.5 mm Rear 0.5 mm

Comments: \_\_\_\_\_

### Upper Arm Position:



### 4.8mm Ball Stud:

- UM129(Std)
- 97050M

### Upper Spacer:

0 mm

### Camber

-1.5 °

### Bump Steer Spacer:

1 mm

### Toe:

- In
- Out 1 °

### Sway Bar:

- None
- 1.0 mm

### Ackerman Spacer:

3 mm

### Spacer:

2 mm

### Axle-Height Spacer:

- Up
- Down

### Caster Block:

- 7°
- 13°
- 10°

### Shock Position:

Wheelbase: Front 1 mm Rear 1 mm

### Sus. Bush:


- Wide
- Narrow(Std)

### Front Diff:

- Gear Diff. # 2,000
- Ball Diff.

## Rear Suspension:

### Shock Position:



### Shock Stay:

- Std.
- Carbon (LAW59)
- Other

### Wing Stay Position:

### Lower Sus Holder Block: Toe In:

Front In\_D Rear In\_D 3.0

### Lower Sus Holder Spacer:

Front 0.5 mm Rear 0.5 mm

Comments: \_\_\_\_\_

### Upper Arm Position:



### 4.8mm Ball Stud:

- 97050M(Std)
- UM129

### Upper Spacer:

0 mm

### Camber

1.5 °

### Hub Carrier:

- 0°Type-B(UM519)
- 0°Type-B2(UM519-2)
- 0°Alu(UMW704-0)
- 0.5°Alu(UMW704-05)
- 1°Alu(UMW704-1)

### Upper Spacer:

2 mm

### Sus. Arm:

- LA272
- UM713B
- UM762(Std)

### Sus. Bush:

- IN
- OUT (Std.)

### Shock Position:

Wheelbase: Front 1 mm Rear 1 mm

### Wheelbase:

Front: 1 mm Rear: 3 mm

### Center Drive :

- Diff. Gear
  - Slipper Clutch
- # \_\_\_\_\_

### Rear Diff:

- Gear Diff. # 2,000
- Ball Diff.

## Shock:

### Shock Piston:

Front 2x1.6 Std Rear 2x1.7 Std

### Shock Oil:

# 550 # 500

### Shock Spring:

Yellow Red

### Limiters:

in out 0 mm in out 0 mm


### Shock Length (A):

20.0 mm 28.0 mm


### Shock Top Type:

- Alu. (UM719)
- UM753-1B(Std.)

### Ball End:



### Spring Sheet:



## Body / Wing:

### Body:

LAB07LW (t0.6)

### Wing Dum Height:

25 mm

### Wing:

UM767

### Wing Angle:

- 4°
- 7°
- 10°

### Lip Height:

20 mm

### Material:

- Screw:  Steel  Titanium


### Pinion Gear:

- Steel
- Aluminum

### Shock O-Ring:

- O-ring
- X-ring
- Red
- Clear

## Chassis:

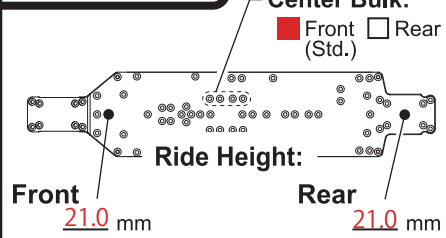

### Center Bulk:

- Front
- Rear (Std.)

Front 21.0 mm

Rear 21.0 mm

### Tire:

	Front	Rear
Tire:	<u>PL-Electron</u>	<u>PL-Electron</u>
Compound:	<u>MC</u>	<u>MC</u>
Inserts:	<u>Std</u>	<u>Std</u>
Wheel:	<u>W5201W</u>	<u>W5202W</u>
Note:	_____	

## Electronics:

Motor: ULTIMATE 5.5T **ORION**

Pinion / Spur: 18/78

ESC: ORION HMX 10

Radio: FUTABA 7PX

Servo: OS T-1

Battery: ORION 3800 LCG

### Comment :

New option parts  
 LAW70 LD Carbon Front Shock Stay  
 LAW71 Carbon Front Lower Blace  
 LAW72 Carbon Rear Lower Blace

### Truck Condition

- Smooth
- Bumpy
- Low Truaction
- Med. Truaction
- Higt Truaction
- Wet
- Dry
- Sandy
- Soft Dirt
- Grass
- Blue Groore
- Clay
- Dusty
- \_\_\_\_\_