


# LAZER ZX7 SET UP SHEET



Name 秋元 宏太 Date 19/3/24 Truck / City オームツインサーキット Event ベストラップ 12.8  
KYOSHO EP OFFROAD MEETING 予選タイム 23L 5:09

## Front Suspension:


### Shock Position:



**Shock Stay:**  
 Std.  
 Carbon (LAW58)  
 Other Low down type LAW70

**Lower Sus Holder Block:**  
 Front Out\_D Rear Out\_D  
**Lower Sus Holder Spacer:**  
 Front 0.5 mm Rear 0.5 mm


### Upper Arm Position:



**4.8mm Ball Stud:**  
 UM129(Std)  
 97050M


**Upper Spacer:** 1 mm  
**Camber** 2 °

### Bump Steer Spacer:



**Toe:**  
 In  
 Out 1 °


**Sway Bar:**  
 None  
 1.2 mm

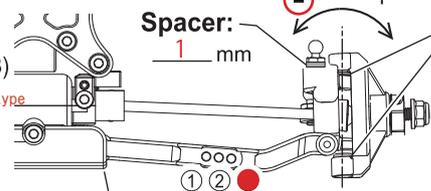

**Spacer:** 1 mm

**Axle-Height Spacer:**  
 Up  
 Down

**Caster Block:**  
 7°  13°  
 10°



**Ackerman Spacer:** 2 mm

**Shock Position:**  
 Wheelbase: Front 1 mm Rear 1 mm


**Sus. Bush:**  
 Wide  
 Narrow(Std)

### Front Diff:

Gear Diff. # 5,000  
 Ball Diff.

## Rear Suspension:


### Shock Position:



**Shock Stay:**  
 Std.  
 Carbon (LAW59)  
 Other

**Wing Stay Position:**  
**Lower Sus Holder Block:** Toe In: Front OUT\_B Rear OUT\_B 3.0  
**Lower Sus Holder Spacer:**  
 Front 0.5 mm Rear 0.5 mm

### Upper Arm Position:




**4.8mm Ball Stud:**  
 97050M(Std)  
 UM129


**Upper Spacer:** 0 mm  
**Camber** 2 °

**Sus. Arm:**  
 LA272  
 UM713B  
 UM762(Std)

### Hub Carrier:



0°Type-B(UM519)  
 0°Type-B2(UM519-2)  
 0°Alu(UMW704-0)  
 0.5°Alu(UMW704-05)  
 1°Alu(UMW704-1)

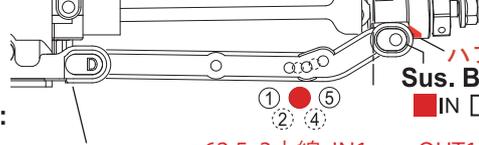

**Wheelbase:** 62.5 3本線 IN1mm OUT1mm  
 Front 2 mm Rear 0 mm

**Upper Spacer:** 2 mm

**Sus. Bush:**  
 IN  OUT (Std.)

**Sway Bar:**  
 None  
 1.2 mm

**Wheelbase:**  
 Front: 1 mm  
 Rear: 3 mm

### Center Drive :


Diff. Gear  Slipper Clutch  
 # \_\_\_\_\_

### Rear Diff:


Gear Diff. # 5,000  
 Ball Diff.

## Shock:


	Front	Rear
Shock Piston:	<u>2x1.6</u>	<u>2x1.7</u>
Shock Oil:	# <u>450</u>	# <u>350</u>
Shock Spring:	<u>Yellow</u>	<u>Red</u>
Limiters:	in <u>0</u> mm out <u>0</u> mm	in <u>0</u> mm out <u>0</u> mm
Shock Length (A):	<u>21.0</u> mm	<u>28.0</u> mm
Shock Top Type:	<input type="checkbox"/> Alu. (UM719) <input checked="" type="checkbox"/> UM753-1B(Std.)	




### Ball End:

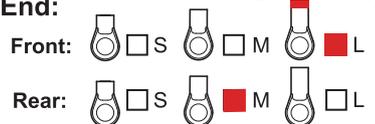

### Spring Sheet:



## Chassis:

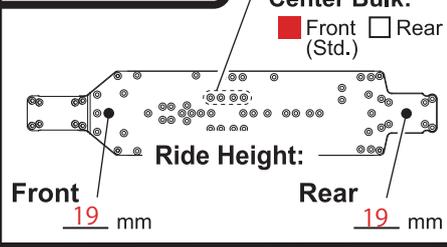

**Center Bulk:**  
 Front  Rear (Std.)

**Ride Height:**  
 Front 19 mm Rear 19 mm

## Electronics:

**Motor:** ORION ULTIMATE 5.5T  
**Pinion / Spur:** 19/78  
**ESC:** ORION HMX 10  
**Radio:** FUTABA 7PX  
**Servo:** OS T-1 SR1  
**Battery:** ORION 5800 STD  
 CHARGE 4.0A 8.30V CUT

## Tire:

	Front	Rear
Tire:	<u>PL-Prime</u>	<u>PL-Prime</u>
Compound:	<u>MC</u>	<u>MC</u>
Inserts:	<u>Std</u>	<u>Std</u>
Wheel:	<u>W5201W</u>	<u>W5202W</u>
Note:	<u>TC2プラス 10分</u>	<u>TC2プラス 10分</u>

## Body / Wing:

**Body:** LAB07LW (t0.6)  
**Wing:** UM767  
**Wing Dum Height:** 30 mm  
**Wing Angle:**  4°  7°  10°  
**Lip Height:** 15 mm

## Material:

**Screw:**  Steel  Titanium  
**Pinion Gear:**  Steel  Aluminum  
**Shock O-Ring:**  O-ring  X-ring  Red  Clear

## Comment :

※その他オプションは  
 上記セッティング項目内参照  
 LAW71 カーボンフロントブレース  
 LAW72 カーボンリヤブレース  
 LAW75 チタンビスセット

## Truck Condition

<input checked="" type="checkbox"/> Smooth	<input type="checkbox"/> Sandy
<input type="checkbox"/> Bumpy	<input type="checkbox"/> Soft Dirt
<input type="checkbox"/> Low Truction	<input type="checkbox"/> Grass
<input type="checkbox"/> Med. Truction	<input type="checkbox"/> Blue Groore
<input checked="" type="checkbox"/> Higt Truction	<input type="checkbox"/> Clay
<input type="checkbox"/> Wet	<input type="checkbox"/> Dusty
<input type="checkbox"/> Dry	<input checked="" type="checkbox"/> カーペット