


LAZER ZX7 SET UP SHEET



Name Kohta Akimoto Date 19/1/13 Truck / City RC Maniax Arena Event _____

Front Suspension:

Shock Position:



Shock Stay:
 Std.
 Carbon (LAW58)
 Other Low down type LAW70

Lower Sus Holder Block: Front Out_B Rear Out_B

Lower Sus Holder Spacer: Front 0.5 mm Rear 0.5 mm

Comments: _____

Upper Arm Position:




4.8mm Ball Stud:
 UM129(Std)
 97050M

Upper Spacer: 1 mm


Camber 1.5°

Spacer: 1 mm

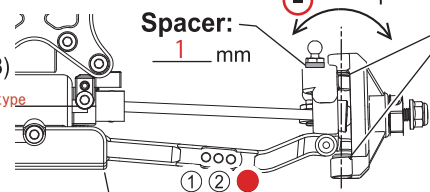

Shock Position:
Wheelbase: Front 1 mm Rear 1 mm

Bump Steer Spacer: 1 mm



Toe:
 In
 Out 1°

Sway Bar:
 None
 1.1 mm


Ackerman Spacer: 3 mm

Front Diff:

Gear Diff. # 2,000
 Ball Diff. _____

Rear Suspension:

Shock Position:



Shock Stay:
 Std.
 Carbon (LAW59)
 Other

Wing Stay Position:

Lower Sus Holder Block: Toe In: Front In_D Rear In_D 3.0

Lower Sus Holder Spacer: Front 0.5 mm Rear 0.5 mm

Comments: _____

Upper Arm Position:




4.8mm Ball Stud:
 97050M(Std)
 UM129

Upper Spacer: 0 mm

Camber 1.5°

Sus. Arm:
 LA272
 UM713B
 UM762(Std)

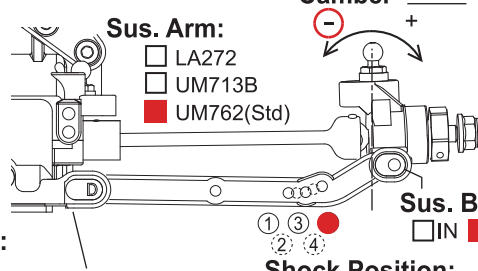

Wheelbase: Front 2 mm Rear 0 mm


Hub Carrier:

0°Type-B(UM519)
 0°Type-B2(UM519-2)
 0°Alu(UMW704-0)
 0.5°Alu(UMW704-05)
 1°Alu(UMW704-1)

Upper Spacer: 2 mm

Sus. Bush:
 IN OUT (Std.)

Shock Position:



Wheelbase: Front: 1 mm Rear: 3 mm

Center Drive :


Diff. Gear Slipper Clutch
 # _____

Rear Diff:


Gear Diff. # 2,000
 Ball Diff. _____

Shock:


	Front	Rear
Shock Piston:	<u>2x1.6 Std</u>	<u>2x1.7 Std</u>
Shock Oil:	# <u>500</u>	# <u>450</u>
Shock Spring:	<u>Yellow</u>	<u>Red</u>
Limiters:	in <u>0</u> mm out <u>0</u> mm	in <u>0</u> mm out <u>0</u> mm
Shock Length (A):	<u>20.0</u> mm	<u>28.0</u> mm
Shock Top Type:	<input type="checkbox"/> Alu. (UM719) <input checked="" type="checkbox"/> UM753-1B(Std.)	




Ball End:



Spring Sheet:



Chassis:

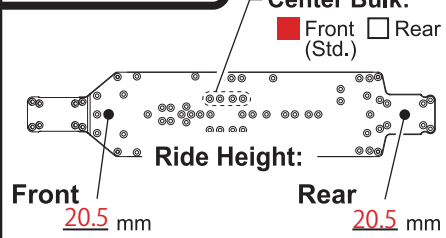

Center Bulk: Front Rear (Std.)

Ride Height: Front 20.5 mm Rear 20.5 mm

Electronics:

Motor: ORION ULTIMATE 5.5T

Pinion / Spur: 18/78

ESC: ORION HMX 10

Radio: FUTABA 7PX

Servo: OS T-1

Battery: ORION 5800

Tire:

	Front	Rear
Tire:	<u>PL-Prime</u>	<u>PL-Prime</u>
Compound:	<u>MC</u>	<u>MC</u>
Inserts:	<u>Std</u>	<u>Std</u>
Wheel:	<u>W5201W</u>	<u>W5202W</u>

Body / Wing:

Body: LAB07LW (t0.6)

Wing Dum Height: 25 mm

Wing: UM767

Wing Angle: 4° 7° 10°

Lip Height: 20 mm

Comment :

New option parts
 LAW70 LD Carbon Front Shock Stay
 LAW71 Carbon Front Lower Blace
 LAW72 Carbon Rear Lower Blace

Truck Condition

<input checked="" type="checkbox"/> Smooth	<input type="checkbox"/> Sandy
<input type="checkbox"/> Bumpy	<input type="checkbox"/> Soft Dirt
<input type="checkbox"/> Low Truction	<input type="checkbox"/> Grass
<input type="checkbox"/> Med. Truction	<input type="checkbox"/> Blue Groore
<input checked="" type="checkbox"/> Higt Truction	<input checked="" type="checkbox"/> Clay
<input type="checkbox"/> Wet	<input type="checkbox"/> Dusty
<input type="checkbox"/> Dry	<input type="checkbox"/> _____

Material:

Screw: Steel Titanium

Pinion Gear: Steel Aluminum

Shock O-Ring: O-ring X-ring Red Clear