


LAZER ZX7 SET UP SHEET



Name Kohta Akimoto Date 19/3/10 Truck / City RC MANIAX ARENA Event Fastest Lap 16.2
Total 19/5:16

Front Suspension:

Shock Position:



Shock Stay:

- Std.
- Carbon (LAW58)
- Other Low down type LAW70

Lower Sus Holder Block:

Front Out_D Rear Out_D

Lower Sus Holder Spacer:

Front 0.5 mm Rear 0.5 mm

Comments: _____

Upper Arm Position:



4.8mm Ball Stud:

- UM129(Std)
- 97050M

Upper Spacer:

1 mm

Camber

2 °

Bump Steer Spacer:

1 mm

Toe:

- In
- Out 1 °

Sway Bar:

- None
- 1.2 mm

Spacer:

1 mm

Axle-Height Spacer:

- Up
- Down

Caster Block:

- 7°
- 13°
- 10°

Ackerman Spacer:

2 mm

Shock Position:

Wheelbase: Front 1 mm

Rear 1 mm

Sus. Bush:

- Wide
- Narrow(Std)


Front Diff:

Gear Diff. # 3,000

Ball Diff.

Rear Suspension:

Shock Position:



Shock Stay:

- Std.
- Carbon (LAW59)
- Other

Wing Stay Position:

Lower Sus Holder Block: Toe In:

Front OUT_B Rear OUT_B 3.0

Lower Sus Holder Spacer:

Front 0.5 mm Rear 0.5 mm

Comments: _____

Upper Arm Position:



4.8mm Ball Stud:

- 97050M(Std)
- UM129

Upper Spacer:

0 mm

Sus. Arm:

- LA272
- UM713B
- UM762(Std)

Camber

2 °

Hub Carrier:

- 0°Type-B(UM519)
- 0°Type-B2(UM519-2)
- 0°Alu(UMW704-0)
- 0.5°Alu(UMW704-05)
- 1°Alu(UMW704-1)

Upper Spacer:

2 mm

Wheelbase:

Front 2 mm

Rear 0 mm

Sus. Bush:

- IN
- OUT
- (Std.)

Wheelbase:

Front: 1 mm

Rear: 3 mm

Center Drive :

Diff. Gear Slipper Clutch

200,000

Rear Diff:

Gear Diff. # 3,000

Ball Diff.

Shock:

Shock Piston:

Front 2x1.6

Rear 2x1.7

Shock Oil:

450

350

Shock Spring:

Orange

Red

Limiters:

in 0 mm

out 0 mm

Shock Length (A):


21.0 mm

28.0 mm


Shock Top Type:

- Alu. (UM719)
- UM753-1B(Std.)

Ball End:




Spring Sheet:



Chassis:

Center Bulk:

- Front
- Rear
- (Std.)

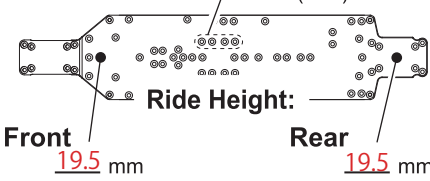

Front 19.5 mm

Rear 19.5 mm

Tire:

Front

Rear

Tire:	<u>PL-Prime</u>	<u>PL-Prime</u>
Compound:	<u>MC</u>	<u>MC</u>
Inserts:	<u>Std</u>	<u>Std</u>
Wheel:	<u>W5201W</u>	<u>W5202W</u>
Note:	_____	

Electronics:

Motor: ORION ULTIMATE 5.5T

Pinion / Spur: 19/78

ESC: ORION HMX 10

Radio: FUTABA 7PX

Servo: OS T-1 SR1

Battery: ORION 4000 LCG
CHARGE 4.5A 8.30V CUT

Body / Wing:

Body:

LAB07LW (t0.6)

Wing Dum Height:

30 mm

Wing:

UM767

Wing Angle:

- 4°
- 7°
- 10°

Lip Height:

15 mm

Material:

Screw: Steel Titanium

Pinion Gear:

- Steel
- Aluminum

Shock O-Ring:

- O-ring
- X-ring
- Red
- Clear

Comment :

LAW71 Carbon Front Lower Blade
 LAW72 Carbon Rear Lower Blade
 LAW75 Titanium Screw Set

Truck Condition

- Smooth
- Bumpy
- Low Truction
- Med. Truction
- Higt Truction
- Wet
- Dry
- Sandy
- Soft Dirt
- Grass
- Blue Groore
- Clay
- Dusty
- _____