


ULTIMA RZ6 SET UP SHEET



Name _____ Date _____ Truck / City _____ Event _____

Front Suspension:

Shock Position:



Upper Spacer: _____ mm

4.8mm Ball Stud:
 UM128(Std.)
 UMW508(+2mm High Mount)

Camber: _____ °
 - +

AL. Steering Support:
 None
 UMW724

4.8mm Ball Stud:
 LA246 (-1mm Low Mount)
 97050M (Std)

Ackerman Steer Spacer: _____ mm

Ackerman arrow direction:
 Front(std) Rear

Option:
 UMW701 Alu ST Plate
 UMW702 Alu Clank Arm

Bump Steer Spacer: _____ mm

Toe: In Out _____ °

Tie Rod: _____

Front Bulkhead Weight Placement:

- None
- Bulkhead Inside _____ 9
- On the skid plate _____ 9

Caster:
 25°
 30°


Spacer:
 0.5
 1.0
 None

Caster Block:
 0°
 2°
 4°

Axle Spacer:
 Out _____ mm
 In _____ mm

Wheel Hub:
 UM569 / Std
 UM506

Caster Block Position:
 IN (wide/Std)
 OUT (Narrow)

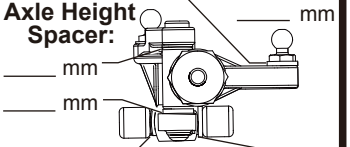

Wheelbase: F: _____ mm R: _____ mm

Comments: _____

Rear Suspension:


Shock Position:



Wing Stay Position:

Shock Stay Type:
 LA352(std)
 LAW59 (Carbom/2mmLow)

Upper Arm Position:



4.8mm Ball Stud:
 97050M(Std)
 UM129

Upper Spacer: _____ mm


Camber: _____ °
 - +

Sus.Arm:
 LA272(std)
 UM713B

Upper Spacer:


_____ mm

Hub Carrier:



Type-B (UM519)
 Type-B2 (UM519-2)


- 0°Type-B(UM519)
- 0°Type-B2(UM519-2)
- 0°Alu(UMW704-0)
- 0.5°Alu(UMW704-05)
- 1°Alu(UMW704-1)

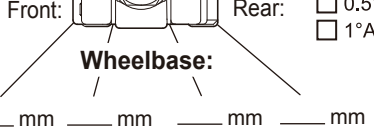


Lower Sus Holder Block:
 Front _____ Rear _____

Lower Sus Holder Spacer:
 Front _____ mm Rear _____ mm

Toe In: _____ °



Sway Bar:
 None
 _____ mm



Comments: _____

Rear Diff:

- Gear Diff. (Oil:# _____)
 (Oil weight: _____ g)
- Ball Diff.

Shock:

Front Rear

Shock Piston: _____


Shock Oil: # _____ # _____

Shock Spring: _____

Limiters:
 in mm in mm
 out mm out mm

Shock Length(A): _____ mm _____ mm

Shock Top Type: Alu(UM719/Std) UM753-1



5.8mm Ball End:
 Front: S M L
 Rear: S M L

Body / Wing:

Body: _____ **Wing Mount:** Narrow Wide **Wing Dum Height:** _____ mm


Wing: _____ **Wing Angle:** 4° 7° 10° **Lip Height:** _____ mm

Material: **Screw:** Steel Titanium

Pinion Gear: Steel Aluminium
Shock O-Ring: O-ring X-ring Red Clear

Chassis:

Ride Height:

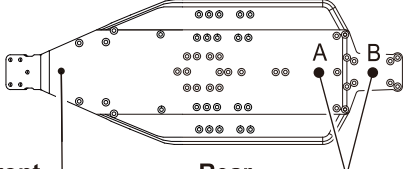

Front _____ mm Rear A B _____ mm

Tire:

Front Rear

Tire: _____

Inserts: _____

Wheel: _____
 Traction Compound: _____

Comment : _____

Electronics:

Battery:

Saddle Pack Short


Battery Position:
 Std 8mm Front

Motor Position:
 Front Rear

Motor Mount Position:
 Std 8mm Front



前
Front



Motor: _____

Pinion/Spur: _____ / _____