


Name
足立 伸之介

Date
2006/06


Truck / CITY
基本セッティング

Event

Front Suspension

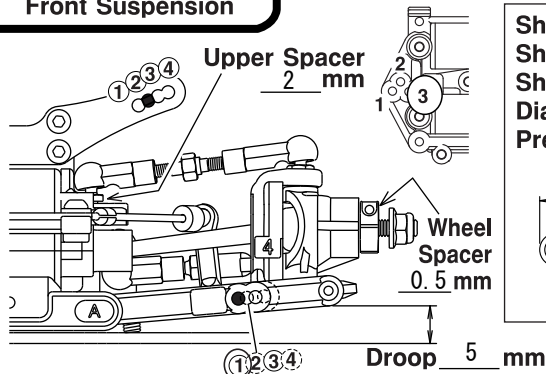

Shock Piston 3 - 1.1
Shock Oil # 450
Shock Spring Blue
Diaphragm W5189-05
Pressure Form ☐ None




Camber Angle 1.0°
Toe Angle 0°
Sway bar ☒ 1.4mm


Front Diff.
☐ Spool
☒ Oneway
☐ Diff.

Battery Placement
☐ Forward
☒ Rear
Post High Spacer
☒ Up
☐ Low


Sus. Holder Spacer




Sus. Holder Bush




Ride Height 4.5 mm
Sus. Arm Spacer Front 2 mm
Rear 1 mm

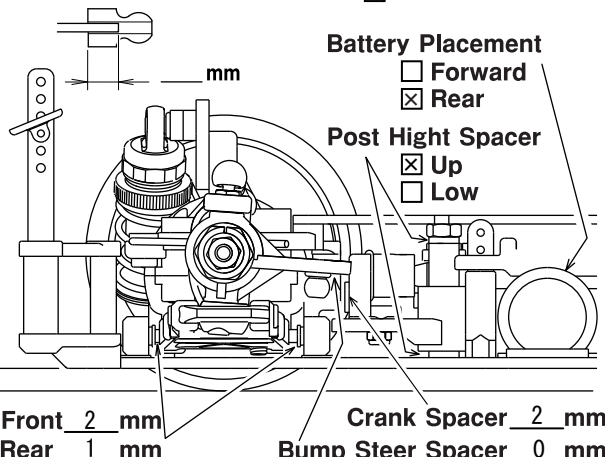


Rear Suspension




Shock Piston 3 - 1.1
Shock Oil # 400
Shock Spring Red
Diaphragm W5189-05
Pressure Form ☐ None



Camber Angle 1.5°
Toe Angle 3°
Sway bar ☒ 1.2mm

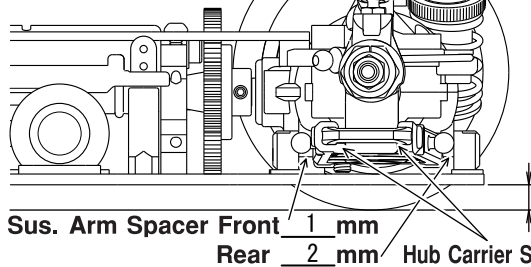

Ride Height 5.0 mm
Front 1 mm
Rear 1 mm

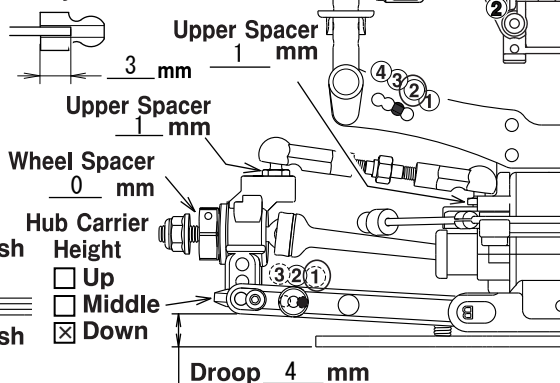

Tire

Tire _____
Inserts _____
Wheel _____
Traction Compound 1st: _____ 2nd: _____

Comments

Others

Motor 23T Stock 2nd Gear Ratio : 2.5
Pinion/Spur _____ / 96 Gear Ratio _____
Battery IB4200 ESC VFS-1Comp
Body _____ Wing _____

Truck Condition

☒ Smooth ☒ Asphalt
☒ Bumpy ☐ Concrete
☐ Low Truction ☐ Carpet
☒ Med. Truction ☒ Indoor
☐ Higt Truction ☒ Outdoor


Spring Rate

#30	Red	W5189-30
#32	Yellow	W5189-32
#34	Blue	W5189-34


Diaphragm




Toe Angle

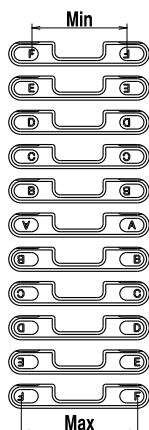

Weight Placement

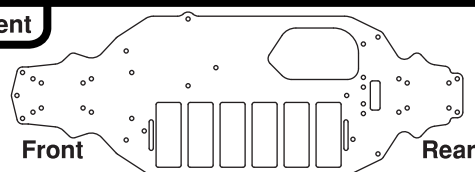

Shock Piston



Sway Bar

1.0	Nickel
1.1	Gold
1.2	Silver
1.3	Copper
1.4	Black
1.5	Golden
1.6	Chromium

		in					Out					
		FF	EE	DD	CC	BB	AA	BB	CC	DD	EE	FF
In	FF	0.0	0.5	1.0	1.5	2.0	2.5	3.0	3.5	4.0	5.0	5.5
	EE	-0.5	0.0	0.5	1.0	1.5	2.0	2.5	3.0	3.5	4.0	5.0
	DD	-1.0	-0.5	0.0	0.5	1.0	1.5	2.0	2.5	3.0	3.5	4.0
	CC	-1.5	-1.0	-0.5	0.0	0.5	1.0	1.5	2.0	2.5	3.0	3.5
	BB	-2.0	-1.5	-1.0	-0.5	0.0	0.5	1.0	1.5	2.0	2.5	3.0
Out	AA	-2.5	-2.0	-1.5	-1.0	-0.5	0.0	0.5	1.0	1.5	2.0	2.5
	BB	-3.0	-2.5	-2.0	-1.5	-1.0	-0.5	0.0	0.5	1.0	1.5	2.0
	CC	-3.5	-3.0	-2.5	-2.0	-1.5	-1.0	-0.5	0.0	0.5	1.0	1.5
	DD	-4.0	-3.5	-3.0	-2.5	-2.0	-1.5	-1.0	-0.5	0.0	0.5	1.0
	EE	-5.0	-4.0	-3.5	-3.0	-2.5	-2.0	-1.5	-1.0	-0.5	0.0	0.5
	FF	-5.5	-5.0	-4.0	-3.5	-3.0	-2.5	-2.0	-1.5	-1.0	-0.5	0.0