


ULTIMA R26 SET UP SHEET



Name D.Sakamoto Date 2016.3.26 Truck / City YATABE ARENA(artificial turf) Event Standard set up

Front Suspension:

Shock Position



Toe: In Out 1.0°

Tie Rod: _____

Front Bulkhead Weight Placement:

- None
 Bulkhead Inside ___ oz ___ g
 On the skid plate ___ oz ___ g * 1oz=28g



Upper Spacer: 0.5 mm

4.8mm Ball Stud: UM128(Std.)
 UMW508 (+2mm High Mount)

4.8mm Ball Stud Spacer: _____ mm



Caster: 25°
 30°

Spacer: A (UM502)
 B (UMW722/Brass)
 B (UMW721/Std)
 B (UMW723/Alu)
 C (UM567)

Caster Block: 0.5 0°
 1.0 2°
 None 4°

Caster Block Position: IN (wide/Std)
 OUT (Narrow)

AL. Steering Support:

- None
 UMW724



4.8mm Ball Stud:

- LA246 (-1mm Low Mount)
 97050M (Std)

Ackerman Steer Spacer:

- 0 mm
 UMW701 Aluminum ST Plate
 UMW702 Aluminum Clank Arm

Axle Spacer:


- Out 0 mm
 In _____ mm

Wheel Hub:

- UM569 / Std
 UM506

Bump Steer Spacer:

Axle Height Spacer: 2.0 mm
0 mm
1.5 mm



Wheelbase: F: 1.0 mm R: 0 mm

Rear Suspension:

Shock Position



Lower Sus Holder Block:


Front in C Rear out D

Lower Sus Holder Spacer:

Front 0 mm Rear 2.0 mm

Comments: _____

Upper Arm Position:



Sus. Arm:

- LA272(Std)
 UM713

4.8mm Ball Stud:


- 97050M(Std)
 UM129

Upper Spacer: 1.0 mm

Camber

2.0°

Hub Carrier:



Upper Spacer: 2.0 mm

Slipper Type:


- Separates
 Direct

- 0°Type-B(UM519)
 0°Type-B2(UM519-2)
 0°Alu(UMW704-0)
 0.5°Alu(UMW704-05)
 1°Alu(UMW704-1)

Sway Bar:

- None
 _____ mm

Shock Position:



Toe In: 2.5°

Wheelbase:

Front: 2.0 mm
Rear: 2.0 mm

Rear Diff:

- Gear Diff. # 3000
 Ball Diff.

Shock:

Shock Piston: Front 1.6×2hole Rear 1.6×2hole

Shock Oil: # 550 # 400

Shock Spring: Pink Gold


Limiters: in mm out mm in mm out mm

Shock Length(A): 20.5 mm 27.5 mm

Shock Top Type: Alu(UM719/Std) UM753-1


5.8mm Ball End: Front: S M L

Rear: S M L



Chassis:

Ride Height:

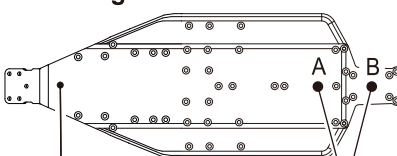

Front 19.0 mm

Rear A B 19.0 mm

Tire:

Front YAU-6770 Rear YAU-6558

Inserts: None YAU-6734

Wheel: Kyosho Kyosho

Traction Compound: _____

Electronics:

Battery: Saddle Pack
 Short

Motor Position: Front
 Rear

Servo Mounting: Straight
 Sideways

Motor: ORION VST2 LW 6.5T

Motor Timing: +2

Pinion/Spur: 21 / 76

ESC: ORION VORTEX R10.1

Radio: KO PROPO EX-1 Ver3

Servo: KO PROPO GRASPER

Lowprofile

Body / Wing:

Body: Blade Wing Mount: Narrow Wide Wing Dum Height: 18.0 mm

Wing: STEP 3.0 Wing Angle: 4° 7° 10° Lip Height: 5.0 mm

Material:

Screw: Steel Titanium

Pinion Gear: Steel Aluminium

Shock O-Ring: O-ring X-ring Red Clear

Comment: Fタイヤ/シュマッカー製カットスタグーロープロ

Rタイヤ/シュマッカー製ミニスパイクスペシャル

Fホイルは、タイヤ幅に合わせて、内側をカット

モーター後方ヘクーリングファンを装着

その他オプションパーツ:カーボンダンパーステーリヤ側(LAW59)

アルミセンタープレート(LAW55)