



Name	T.MARUYAMA	Temp	30 °C	Engine	OS12TG ver3	Muffler	TS 1080
Date	25AUG19	Humidity	%	Head Clearance	mm	Fuel Type	NITRO-X 25%
Track	OS field	Traction	%	Plug No.	P4	Radio	KO PROPO

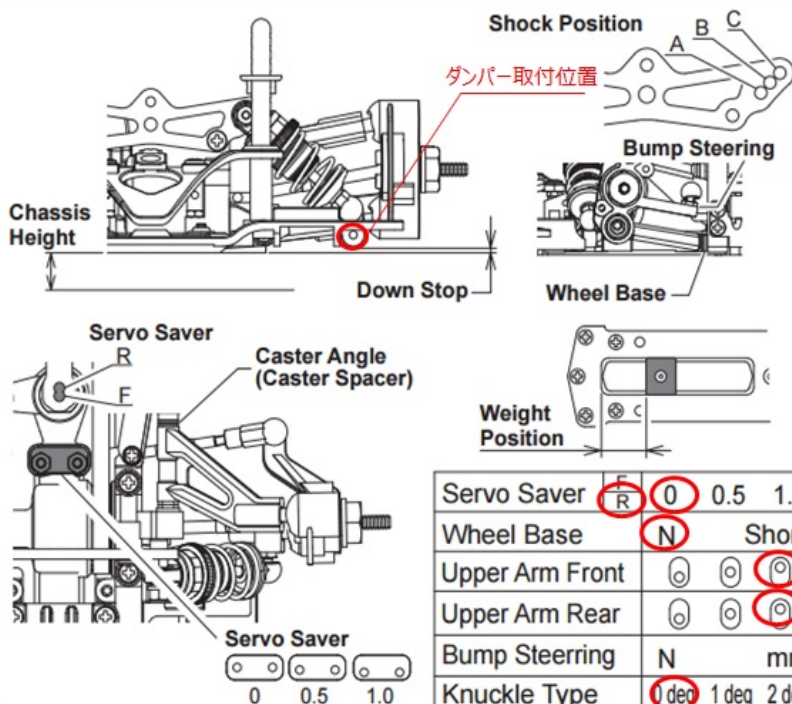

Servo Saver	R	0	0.5	1.0
Wheel Base	N	Short		
Upper Arm Front				
Upper Arm Rear				
Bump Steering	N	mm		
Knuckle Type	1 deg	1 deg	2 deg	

Shock Type	N(Short)ダンパー長10mm
Shock Oil	#650 ※引きダンパー
Shock Piston	N W5307-09 (3hole)
Spring	W5307-30 (RED)
Ball End Type	UM112H (18.5mm)
Shock Position	A B C
Caster Angle(Spacer)	4 mm
Camber Angle	L 0 0.5 1 1.5 2 0G1G R 0 0.5 1 1.5 2
Toe Angle	OUT 1 deg
Front Width	199.5 mm
Down Stop	UP 1 mm
Wheel Spacer	mm
Antiroll Bar	VZ084SS VZ084S VZ084
Tire	RUSH 40VS
Tire Inner	RUSH 超軽量 イエロー
Chassis Height	5.0 mm
Weight Position	mm
Front Diff. Oil	#700,000

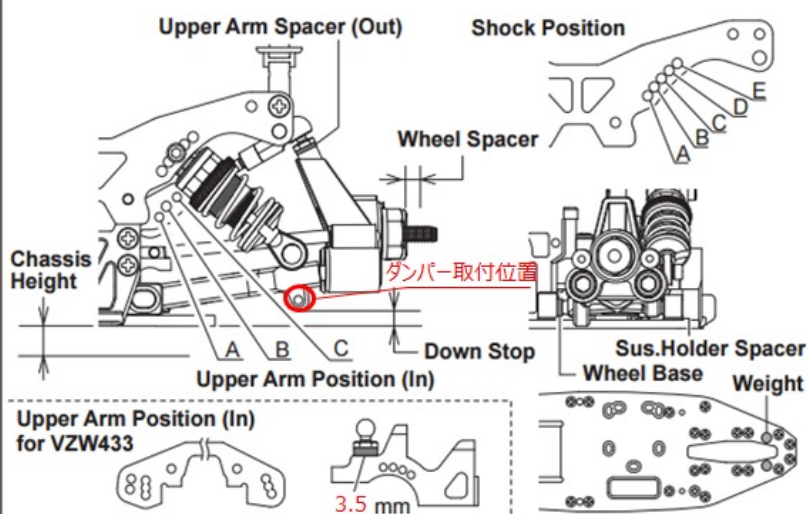

Gear	Total	Gear	Total	Gear	Total	Gear	Total	Gear	Total	Gear	Total
16	61	7.63	16	60	7.50	16	59	7.38	21	56	5.33
17	61	7.18	17	60	7.06	17	59	6.94	22	56	5.09
							59		23	56	4.87
									23	55	4.78
									23	54	4.69

Shock Type	Short ダンパー長10.5mm
Shock Oil	#800 ※引きダンパー
Shock Piston	N W5307-09 (3hole)
Spring	W5307-34 (GREEN)
Ball End Type	UM112H (18.5mm)
Shock Position	A B C D E
Wheel Spacer	
Upper Arm Position (In)	
Upper Arm Spacer (Out)	
Camber Angle	L 0 0.5 1 1.5 2 0G1G R 0 0.5 1 1.5 2
Toe Angle	2.5 deg
Rear Width	200 mm
Down Stop	UP 0.5 mm
Antiroll Bar	N mm
Tire	
Tire Inner	
Chassis Height	5.0 mm
Lower Arm Position	(ZERO) (OUT1mm) N / UP mm
Weight	
Wheel Base	N Short
Body	MR-S ※ウイングのみSC430

Clutch Type	VZW442	Pinion Gear	15 16 17 / 20 21 22 23
Clutch Shoe	VZW442 ※厚み3.0mm	Spur Gear	59 60 61 / 54 55 56
Clutch Weight	VZW442	Drive Ratio	24T Pully 387Belt
Clutch Spring	VZ438		23T Pully 384Belt
Clearance	0.5 mm	Rear Diff. Oil	#10,000
Adjust Nut	1.2 mm	Sus. Holder Spacer	0 mm

memo : 2mmスパーサをバルク下に入れることでロアアーム上げ 前後ともロアアーム下側の穴にダンパーを取り付け
 ブレーキロータはVZ494/ブレーキパッドは92987B
 バッテリー交換を実施するためメインシャーシはVZ437を使用