


NAME	L. COLLARI	TEMP	9 °C	ENGINE	NOVAROSS	MUFFLER	2015
DATE	20-21/03/10	HUMIDITY	%	HEAD CLEARANCE	0.7 mm	FUEL TYPE	MLC
TRACK	LOCOROTONDO	TRACTION	100 %	PLUG No.	7TGF	RADIO	SANNA

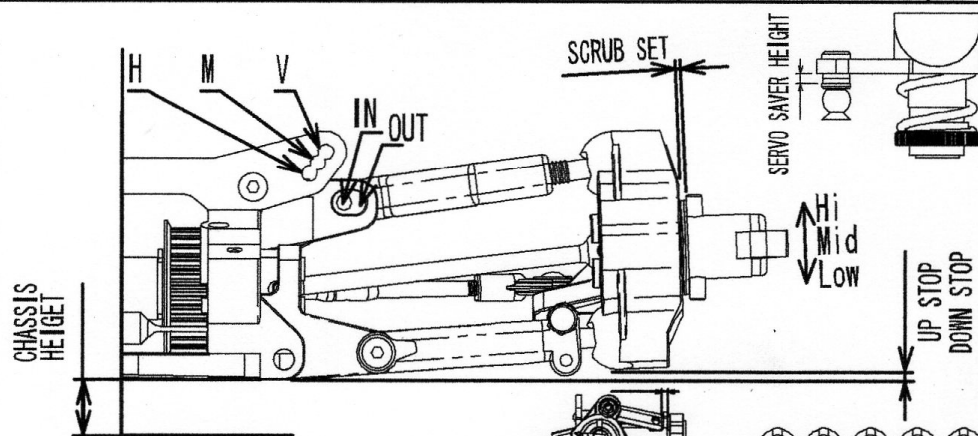


SHOCK OIL	300 350 400 (450) 500 550 600
DIAPHRAGM	(N)
SHOCK PISTON	N 1-1.2
SPRING	1.8 1.9 2.0 (BLUE MUGEN)
SPRING ADJUSTER	3.5 mm
SHOCK POS	H (M) V
SCRUB SET	0.5 (1.0) 1.5 2.0
CASTER ANGLE / W.B	11.6° / N FMW644 / L N S
CAMBER ANGLE OG/1G	L 0 0.5 1 1.5 2 2.5 3 R 0 0.5 1 1.5 2 2.5 3
TOE ANGLE	1.5 °
FRONT WIDTH OG/1G	252 mm
UP STOP	mm
DOWN STOP	1 mm
ANTIROLL BAR	VZ084 VZ084S (Diagrams)
TIRE HARDNESS	32 (35) 37 40
TIRE TYPE	
TIRE DIAMETER	φ 68 mm
CHASSIS HEIGHT	9.5 mm

Normal Sus Arm FM604		
SPACER	W.B Normal	W.B Short
6mm	6.7°	1.7°
5mm	8.4°	3.4°
4mm	10°	5°
3mm	11.6°	6.7°
2mm	13.2°	8.4°
1mm	14.8°	10°
0mm	16.4°	11.6°

Option Sus Arm FMW644		
SPACER	W.B Long	W.B Normal
6mm	6.7°	1.7°
5mm	8.4°	3.4°
4mm	10°	5°
3mm	11.6°	6.7°
2mm	13.2°	8.4°
1mm	14.8°	10°
0mm	16.4°	11.6°

Servo Saver Position	(A) B C B V
Servo Saver Height	4 3 2 1 (0mm)
STEERING ANGLE	100 %
FRONT UPPER (IN/OUT) (FMW607)	0 (0.5) 1.0 1.5mm
KNUCKLE ARM AXLE	(Low) Mid Hi
KNUCKLE ARM SPACER	mm
KNUCKLE ARM TYPE	0° (2°)

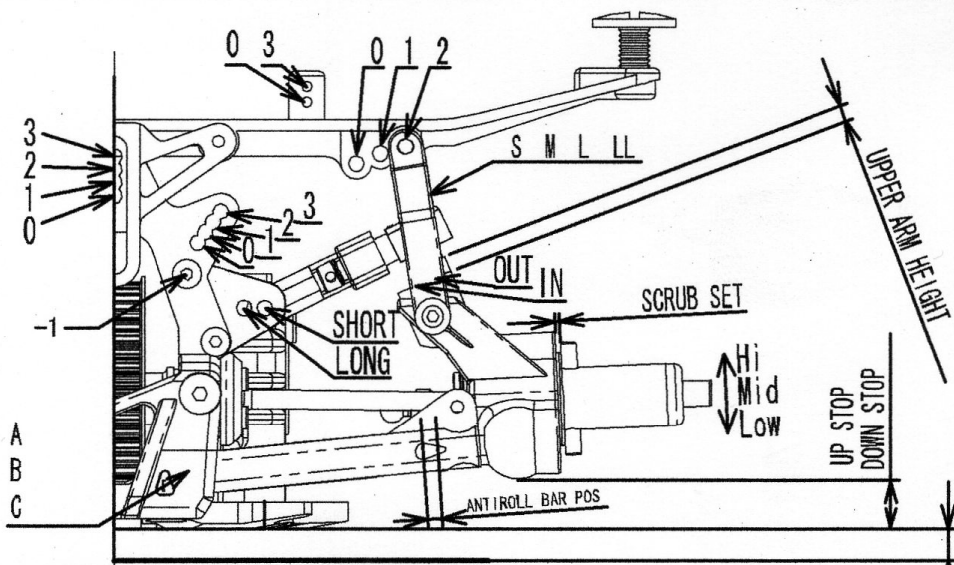

SHOCK OIL	400 450 (500) 550 600 700 800
DIAPHRAGM	(N)
SHOCK PISTON	N 2-1.1
SPRING	(1.8) 1.9 2.0 (GREY MUGEN)
SPRING ADJUSTER	6 mm
SHOCK POS	-1 0 (1) 2 3
SCRUB SET	0.5 1.0 1.5 (2.0)
UPPER ARM	LONG (SHORT) (IN/OUT) 3 mm
CAMBER ANGLE OG/1G	L 0.5 1 1.5 2 2.5 3 3.5 R 0.5 1 1.5 2 2.5 3 3.5
TOE ANGLE	2.8 °
REAR WIDTH OG/1G	262 mm
UP STOP	mm
DOWN STOP	7 mm
ANTIROLL BAR / POS	φ 3 / X mm
TIRE HARDNESS	32 (35) 37 40
TIRE TYPE	
TIRE DIAMETER	φ 75 mm
CHASSIS HEIGHT	10 mm

Rear Pulley 20/48		
GEAR TOTAL	GEAR TOTAL	GEAR TOTAL
15/48 7.68	15/48 7.34	15/50 8.00
16/48 7.20	16/48 7.35	16/50 7.50
17/48 6.78	17/48 6.92	17/50 7.06
18/48 6.36	18/48 6.68	18/46 6.81
20/48 5.76	20/48 6.40	20/46 6.52
21/48 5.45	21/48 6.12	21/46 6.28

Rear Pulley 22/51		
GEAR TOTAL	GEAR TOTAL	GEAR TOTAL
15/48 7.42	15/48 7.57	15/50 7.73
16/48 6.95	16/48 7.10	16/50 7.24
17/48 6.55	17/48 6.68	17/50 6.81
18/48 6.17	18/48 6.44	18/46 6.81
20/48 5.70	20/48 6.22	20/46 6.33
21/48 5.46	21/48 6.01	21/46 6.08

CLUTCH TYPE	2D 3D 4D	PINION GEAR	(15) 16 17 / (19) 20 21
CLUTCH SHOE	BLACK RED GREY	SPUR GEAR	48 (49) 50 / 44 (45) 46
CENTRIFUGAL SHOE	N	Pulley (Side Rear)	(26/18 48/20) (25/18 51/22)
CLUTCH SPRING		CENTER POST POSITION	0 / 1 / (2) / 3
CLEARANCE	mm	BODY MOUNT ANGLE	0 / 1 / (2)
ADJ. NUT	mm	BODY MOUNT HEIGHT	S/M/L/LL 0/3
F-ONEWAY POS	UP / (DOWN)	FRONT CARBON	USE (NOT USE)
BATTERY PLATE	(N) CARBON / STAINLESS	SIDE CARBON	USE (NOT USE)

TIRE DIAMETER	φ 75 mm
CHASSIS HEIGHT	10 mm
SUS HOLDER	A (B) / C
REAR HUB AXLE	(Low) / Mid / Hi
REAR WHEEL BASE	SHORT (LONG)
BODY	MLC A-R10
BODY POSITION	18 mm
REAR SPOILER	S mm