



EVOLVA 2007

SETTING DATA SHEET Ver 1.00

NAME	下 高章	TEMP	°C	ENGINE	SIRIO	MUFFLER	SIRIO2013
DATE	2007/04/12	HUMIDITY	%	HEAD CLEARANCE	mm	FUEL TYPE	トルネード25%
TRACK	ホクセイサーキット	TRACTION	%	PLUG No.	No7	RADIO	サンワM11

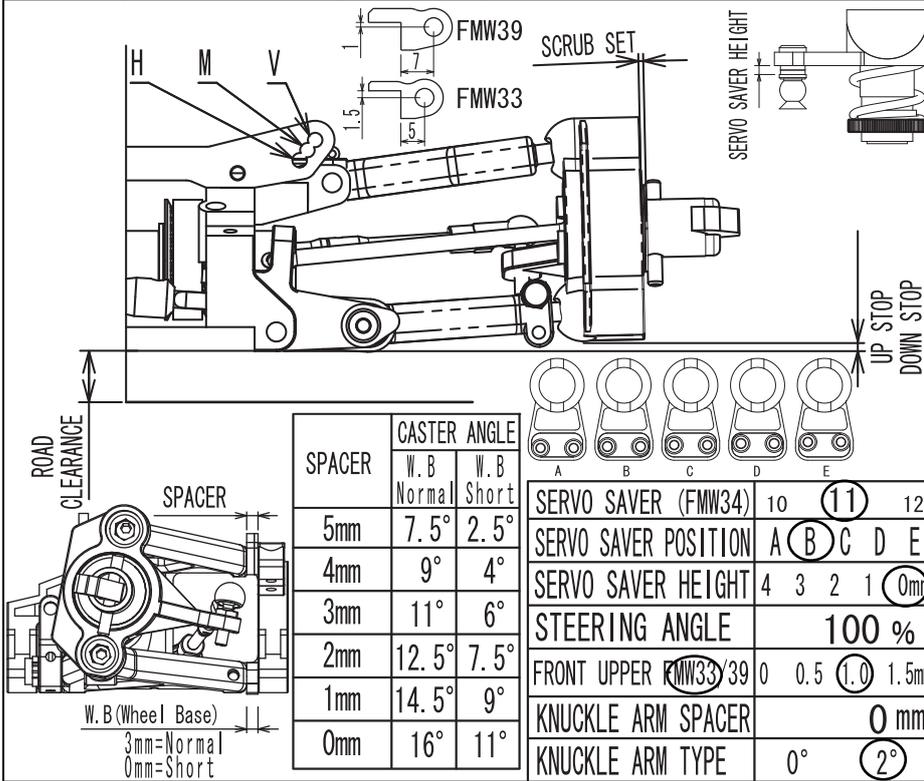

SHOCK OIL	400 450 (500) 550 600 700 800
DIAPHRAGM	(N) (W6006)
SHOCK PISTON	(N) Φ1.2-1Hole
SPRING	1.8 (1.9) 2.0 White
SPRING ADJUSTER	mm
SHOCK POS	(H) M V
SCRUB SET (FMW20-1)	0.5 (1.0) 1.0 (FMW20)
CASTER ANGLE / W. B	11° / Normal (Short)
CAMBER ANGLE	L 0 (0.5) 1 1.5 2 2.5 3 R 0 (0.5) 1 1.5 2 2.5 3
TOE ANGLE	-1°
FRONT WIDTH OG (1G)	252 mm
UP STOP	- mm
DOWN STOP	0 mm
ANTIROLL BAR (VZ084)	(●) (○) (○) (○) (○)
TIRE HARDNESS	(32) 35 37 40
TIRE TYPE	KYOSHO TYRE
TIRE DIAMETER	φ 69 mm
ROAD CLEARANCE	7.5 mm

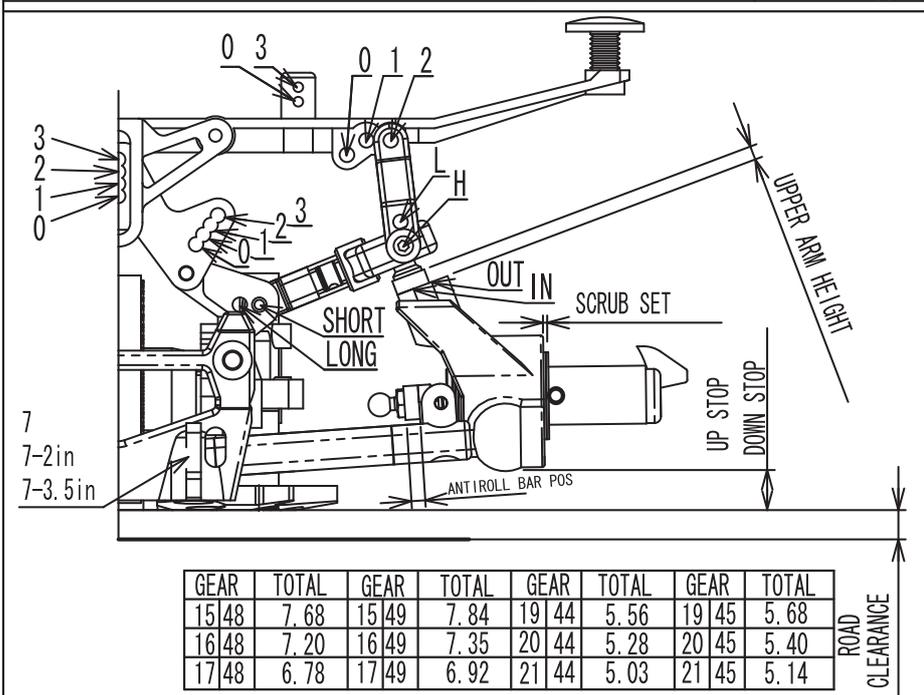

SHOCK OIL	400 450 (500) 550 600 700 800
DIAPHRAGM	(N) (W6006)
SHOCK PISTON	(N) Φ1.1-2Hole
SPRING	1.8 1.9 (2.0) White
SPRING ADJUSTER	mm
SHOCK POS	0 (1) 2 3
SCRUB SET	0.5 1.0 (1.5) 2.0
UPPER ARM LONG (SHORT) (IN) OUT	2 mm
CAMBER ANGLE	L (0.5) 1 1.5 2 2.5 3 3.5 R (0.5) 1 1.5 2 2.5 3 3.5
TOE ANGLE	+2.0°
REAR WIDTH OG (1G)	262 mm
UP STOP	- mm
DOWN STOP	9 mm
ANTIROLL BAR / POS	(3) / (○) 3 mm
TIRE HARDNESS	32 (35) 37 40
TIRE TYPE	KYOSHO TYRE
TIRE DIAMETER	φ 76 mm
ROAD CLEARANCE	8 mm
SUS HOLDER	7 / 7-2in / (7-3.5in)

CLUTCH TYPE	2D (3D) 4D	PINION GEAR	15 (16) 17 / 19 (20) 21
CLUTCH SHOE	BLACK RED (GREY)	SPUR GEAR	48 (49) / 44 (45)
CENTRIFUGAL SHOE	(N)	DRIVE RATIO (mm Difference)	26/18 (420 BELT)
CLUTCH SPRING	4D	CENTER POST POSITION	0 / 1 / 2 / (3)
CLEARANCE	0.5 mm	BODY MOUNT ANGLE	0 / 1 / (2)
ADJ. NUT	1 mm	BODY MOUNT HEIGHT	L / (H) (0) / 3

MEMO 基本セッティングと同じ